


WAAS CH 97533 W19A	APP CRS 193°	Rwy Idg TDZE 857 Apt Elev 858
--	------------------------	---

RNAV (GPS) RWY 19


KEWANEE MUNI (EZI)

RNP APCH - GPS.	Baro-VNAV NA. Use Galesburg altimeter setting. When local altimeter setting not received, use Moline altimeter setting and increase LPV DA to 1212 feet; increase LNAV/VNAV DA to 1446 feet and all visibilities $\frac{1}{8}$ SM. Increase all MDAs 40 feet and LNAV visibility Cat C $\frac{1}{8}$ SM, and Circling visibility Cat C $\frac{1}{4}$.	MISSED APPROACH: Climb to 2400 direct JUBDI and hold.
-----------------	--	--

QUAD CITY APP CON ★ 133.275 257.8	UNICOM 122.8 (CTAF) 0
---	--

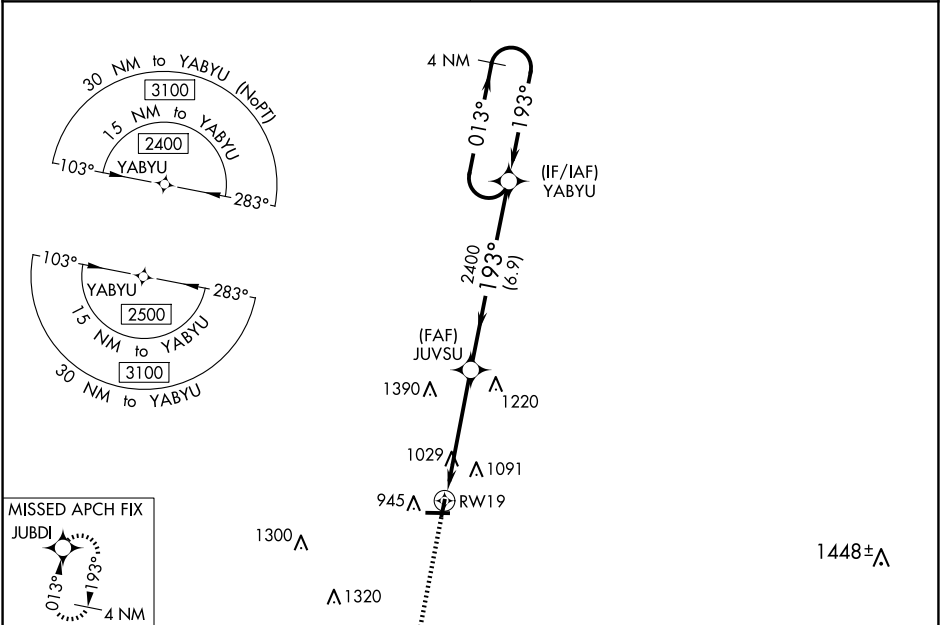

ELEV 858	TDZE 857
-----------------	-----------------

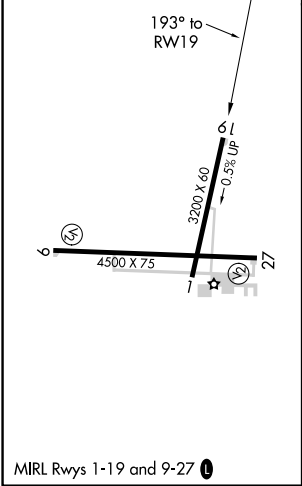

2400 JUBDI				4 NM Holding Pattern			
RWY 19				JUVSU 2400 YABYU			
193°				013° 2400			
4.8 NM				6.9 NM			
GP 3.00° TCH 40							
CATEGORY	A	B	C	D			
LPV DA	1182-1		325 (400-1)		NA		
LNAV/VNAV DA	1416-1 $\frac{5}{8}$		559 (600-1 $\frac{1}{2}$)		NA		
LNAV MDA	1400-1		543 (600-1)		1400-1 $\frac{5}{8}$ 543 (600-1 $\frac{1}{2}$) NA		
CIRCLING	1400-1 542 (600-1)		1520-1 662 (700-1)		1520-1 $\frac{3}{4}$ 662 (700-1 $\frac{3}{4}$) NA		