


WAAS CH 56433 W27A	APP CRS 273°	Rwy Idg TDZE Apt Elev	4500 858 858
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 27


KEWANEE MUNI (EZI)

▼ ▲ NA Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Galesburg altimeter setting; when not received, use Moline altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase LPV all Cats and LNAV Cat C visibility 1/8 mile, and Circling Cat C visibility 1/4 mile.	MISSED APPROACH: Climb to 2400 direct WIKOK and hold.
---	--

QUAD CITY APP CON ★ 133.275 257.8	UNICOM 122.8 (CTAF) 0
---	---------------------------------

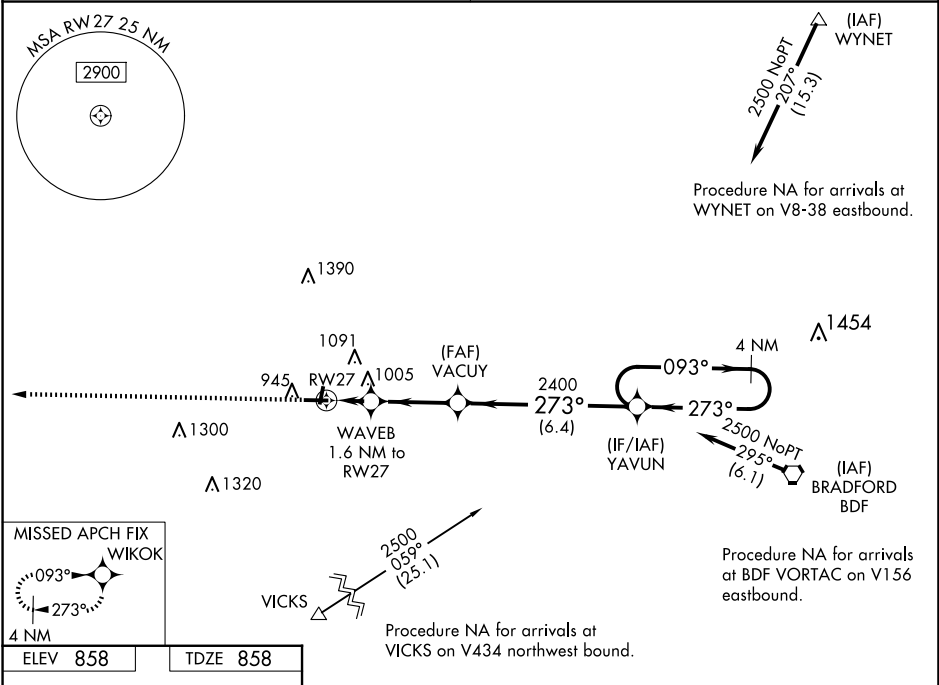

ELEV 858	TDZE 858
----------	----------

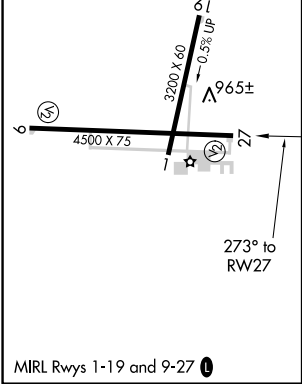

2400	WIKOK	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 23).			4 NM Holding Pattern
*LNAV only		WAVEB 1.6 NM to RWY 27	VACUY 2400	YAVUN	
RWY 27		*1400	2400	273°	093° → 2500
		1.6 NM	3.1 NM	6.4 NM	GP 3.00° TCH 40
CATEGORY	A	B	C	D	
LPV DA	1183-1 1/8 325 (400-1 1/8)			NA	
LNAV/VNAV DA	1212-1 1/4 354 (400-1 1/4)			NA	
LNAV MDA	1340-1	482 (500-1)	1340-1 3/8 482 (500-1 3/8)	NA	
CIRCLING	1340-1 482 (500-1)	1520-1 662 (700-1)	1520-1 3/4 662 (700-1 3/4)	NA	