

APP CRS

286°

Rwy Idg

4001

TDZE

683

Apt Elev

683

RNAV (GPS) RWY 28

HENRY COUNTY (7W5)

RNP APCH.



▼

NA

Rwy 28 helicopter visibility reduction below ¾ SM NA.
Circling Rwy 10 NA at night. Use Toledo Express altimeter setting. When not received, procedure NA.

MISSED APPROACH: Climbing left turn to 2300 direct IZUMY and hold.

TOL ASOS	TOLEDO APP CON	UNICOM
118.75 290.225	134.35 307.0	123.0 (CTAF) 0

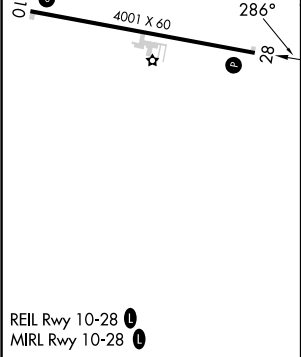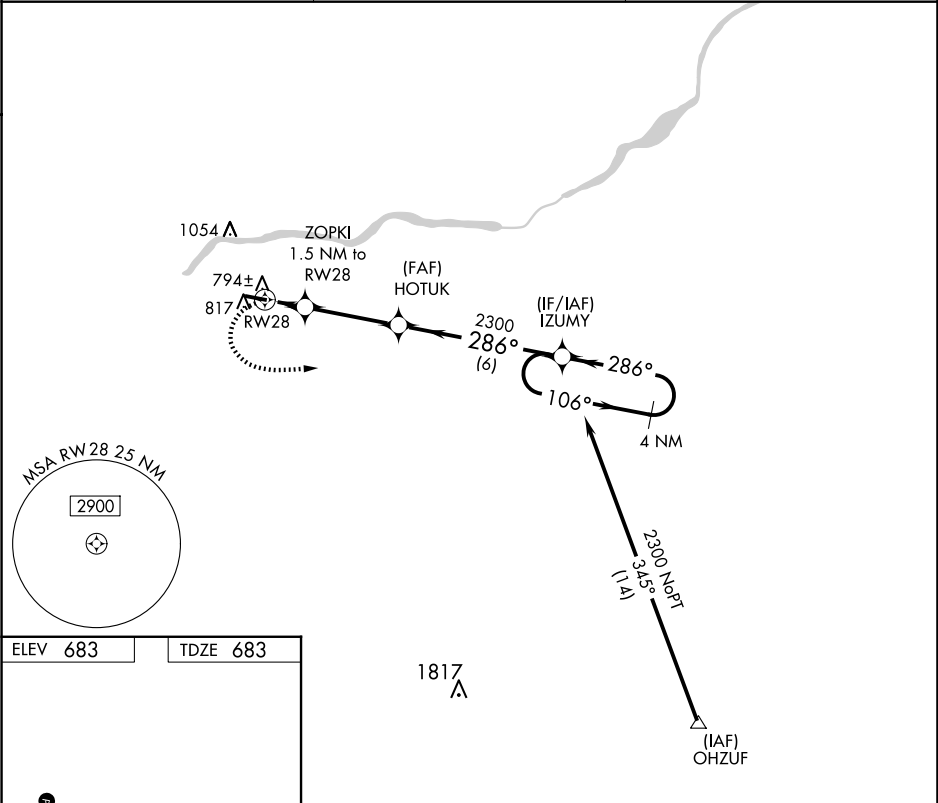

2300  IZUMY 		VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 25).		4 NM Holding Pattern	
 ZOPKI 1.5 NM to RW28 HOTUK IZUMY 286° 106° 2300 2300 1200 3.04° TCH 40 1.5 NM 3.4 NM 6 NM					
CATEGORY	A		B	C	D
LNAV MDA	1100-1 417 (500-1)		1100-1½ 417 (500-1½)		NA
 CIRCLING	1220-1 537 (600-1)		1400-2 717 (800-2)		NA