

24193

RNAV (GPS) RWY 36
JONESBORO (F88)



T VDP NA when using Ruston altimeter setting. Obtain local altimeter setting on CTAF; when not received, use Ruston altimeter setting and increase all MDAs 60 feet, and LP, LNAV and Circling visibility Cat C $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 2400 direct FIMUG and hold.

MONROE APP CON ★
126.9 307.9

CTAF
122.9 **L**




MISSED APCH FIX



ELEV	256		TDZE	256
------	-----	--	------	-----



REIL Rwys 18 and 36 **L**
MIRL Rwy 18-36 **L**

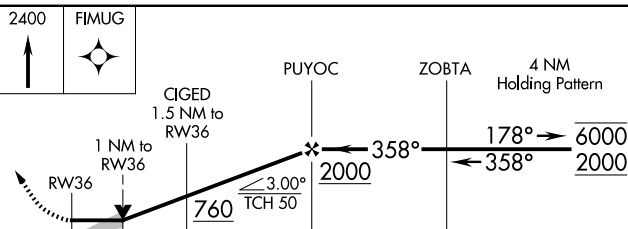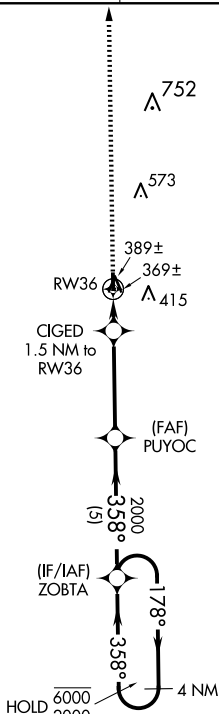

CATEGORY	A	B	C	D
LP MDA	620-1 364 (400-1)			NA
LNAV MDA	640-1 384 (400-1)	640-1 $\frac{1}{8}$ 384 (400-1 $\frac{1}{6}$)		NA
CIRCLING	780-1 524 (600-1)	880-1 $\frac{3}{4}$ 624 (700-1 $\frac{3}{4}$)		NA

JONESBORO (F88)

RNAV (GPS) RWY 36

SC-4, 17 APR 2025 to 15 MAY 2025