| WAAS CH 60939 W04A | APP CRS 045° | Rwy ldg 5002 TDZE 112 Apt Elev 112 |
|---|---|---|

# RNAV (GPS) RWY 4
## DEMOPOLIS RGNL (DYA)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Marion altimeter setting and increase LPV and LNAV/VNAV DA 82 feet and all MDA 100 feet; increase LPV and LNAV/VNAV all Cats visibility ⅜ mile, increase LNAV Cats C/D and Circling Cat C visibility ¼ mile, and increase Circling Cat D visibility ½ mile. Baro-VNAV and VDP NA when using Marion altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3000 direct CUBNO and hold.

| AWOS-3P | MERIDIAN APP CON* | UNICOM |
|---|---|---|
| 119.475 | 121.275 348.7 | 122.8 (CTAF) L |

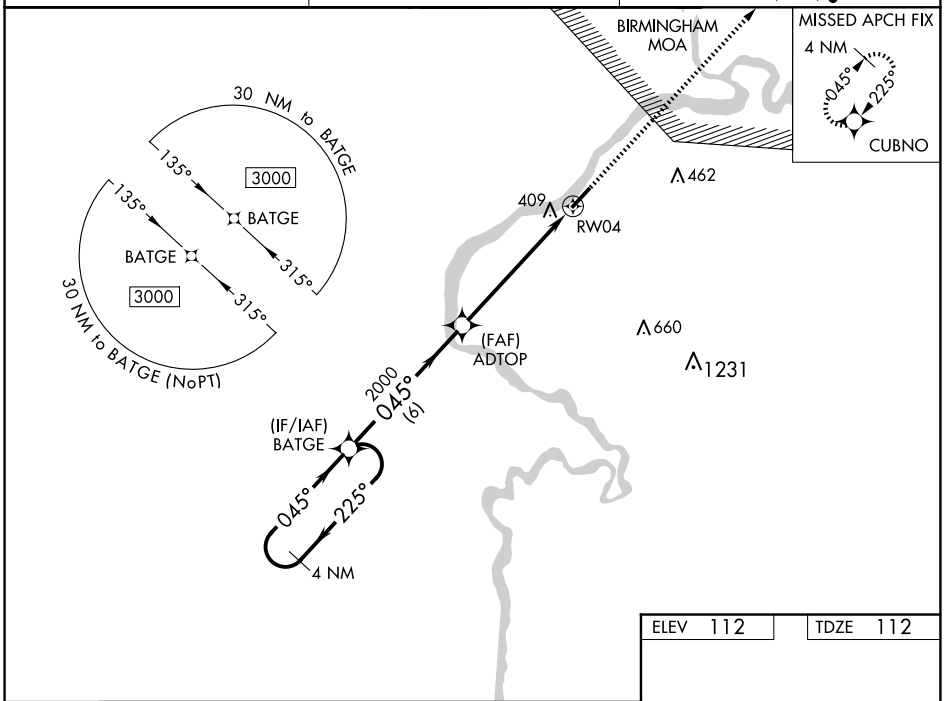


ELEV 112 TDZE 112

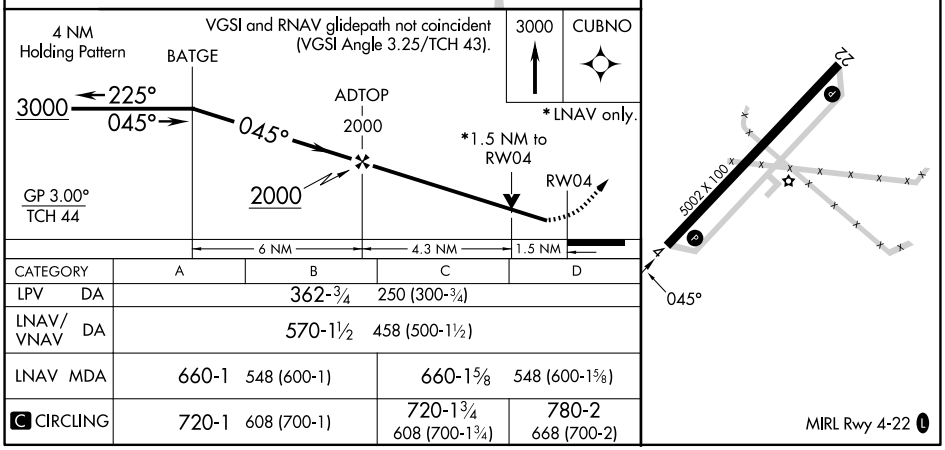


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 362-¾ 250 (300-¾) | | | |
| LNAV/VNAV DA | 570-1½ 458 (500-1½) | | | |
| LNAV MDA | 660-1 548 (600-1) | | 660-1⅝ 548 (600-1⅝) | |
| C CIRCLING | 720-1 608 (700-1) | | 720-1¾ 608 (700-1¾) | 780-2 668 (700-2) |

MIRL Rwy 4-22 L

SE-4, 17 APR 2025 to 15 MAY 2025

SE-4, 17 APR 2025 to 15 MAY 2025