



LONE STAR DEP CON
125.2 343.65
CTAF
122.975



TAKEOFF MINIMUMS
Rwys 18, 36: Standard.

RNAV 1 - DME/DME/IRU or GPS required.
RADAR required for non-GPS equipped aircraft.

TOP ALTITUDE:
ASSIGNED BY ATC

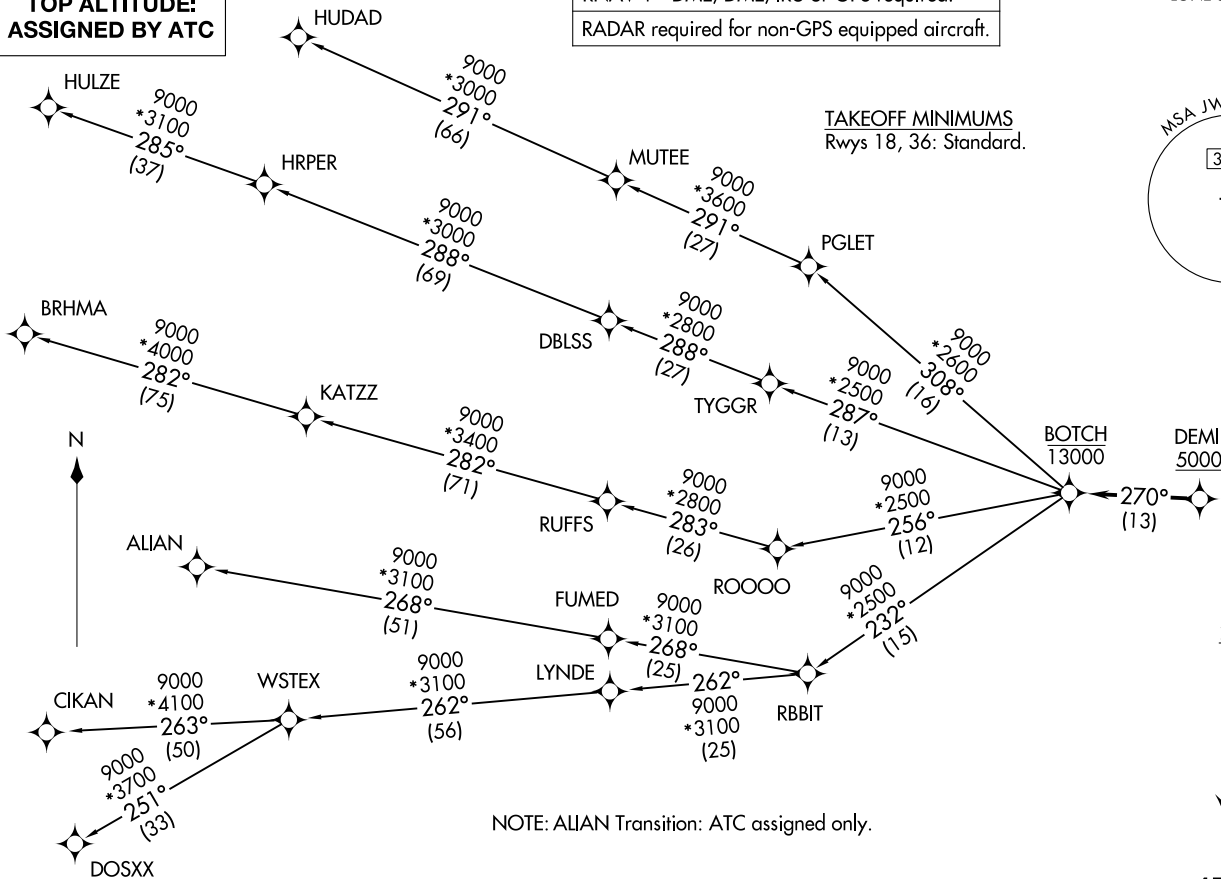

NOTE: ALIAN Transition: ATC assigned only.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 18: Climb on heading 178° to 1700, then on heading 317° or as assigned by ATC, for vectors to cross DEMIL at or above 5000, thence. . .
TAKEOFF RUNWAY 36: Climb on heading 358° to 2700, then on heading 315° or as assigned by ATC, for vectors to cross DEMIL at or above 5000, thence. . .
. . .on track 270° to cross BOTCH at or below 13000, then on (transition). Maintain ATC assigned altitude, expect filed altitude 10 minutes after departure.

- ALIAN TRANSITION (BOTCH1.ALIAN)
- BRHMA TRANSITION (BOTCH1.BRHMA)
- CIKAN TRANSITION (BOTCH1.CIKAN)
- DOSXX TRANSITION (BOTCH1.DOSXX)
- HUDAD TRANSITION (BOTCH1.HUDAD)
- HULZE TRANSITION (BOTCH1.HULZE)
- WSTEX TRANSITION (BOTCH1.WSTEX)

SC-2, 17 APR 2025 to 15 MAY 2025

SC-2, 17 APR 2025 to 15 MAY 2025