

|                                        |                        |                                                     |             |
|----------------------------------------|------------------------|-----------------------------------------------------|-------------|
| WAAS<br>CH <b>86909</b><br><b>W02A</b> | APP CRS<br><b>026°</b> | Rwy Idg<br>TDZE <b>1028</b><br>Apt Elev <b>1028</b> | <b>5500</b> |
|----------------------------------------|------------------------|-----------------------------------------------------|-------------|

RNAV (GPS) RWY 2




MOREHEAD-ROWAN COUNTY CLYDE A THOMAS RGNL (SYM)

**T**  
**A**

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Mount Sterling altimeter setting. When local altimeter setting not received, use Mount Sterling altimeter setting: increase all DA 50 feet and all MDA 60 feet; increase LPV all Cats and LNAV Cats C/D visibility 1/8 mile, LNAV/VNAV all Cats visibility 1/4 mile, and Circling Cats C/D visibility 1/4 mile.

MISSED APPROACH:  
Climb to 3600 direct  
IDABE and hold.

|                         |                                               |                                 |
|-------------------------|-----------------------------------------------|---------------------------------|
| AWOS-3<br><b>119.95</b> | INDIANAPOLIS CENTER<br><b>124.225 360.725</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|-------------------------|-----------------------------------------------|---------------------------------|

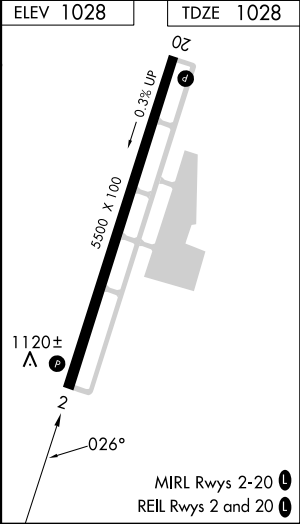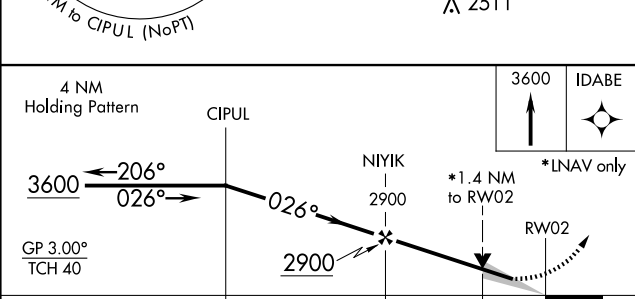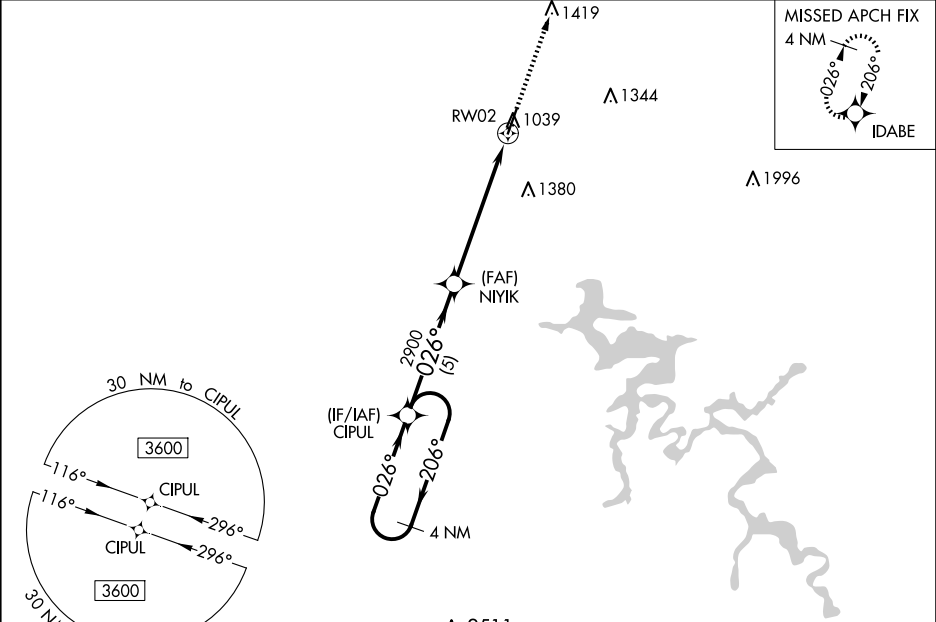

| CATEGORY          | A                          | B           | C                     | D                             |
|-------------------|----------------------------|-------------|-----------------------|-------------------------------|
| LPV DA            | 1228-3/4 200 (200-3/4)     |             |                       |                               |
| LNAV/VNAV DA      | 1439-1 3/8 411 (500-1 3/8) |             |                       |                               |
| LNAV MDA          | 1500-1                     | 472 (500-1) | 1500-1 3/8            | 472 (500-1 3/8)               |
| <b>C</b> CIRCLING | 1520-1                     | 492 (500-1) | 1760-2<br>732 (800-2) | 1820-2 1/2<br>792 (800-2 1/2) |