



ATIS 284.5
CLNC DEL
294.7
GND CON
382.8
Kaneohe Tower
120.7 (CTAF) 360.2
Kaneohe APP/DEP CON
125.0 263.5

Rwy	Knots	60	120	180	240	300	360
22	V/V(fpm)	975	1950	2925	3900	4875	5850

Minimum Climb Rate to 3900

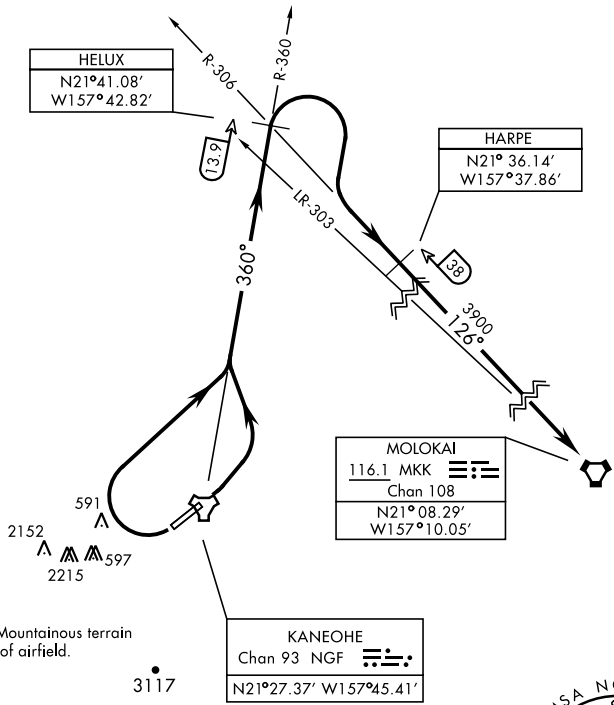

TA 18,000

DEPARTURE ROUTE DESCRIPTION

- TAKEOFF RWY 4: Turn left to intercept NGF TACAN R-360 to HELUX, then intercept MKK VORTAC R-306 to MKK.
- TAKEOFF RWY 22: Turn right as soon as practicable to intercept NGF TACAN R-360 to HELUX, then intercept MKK VORTAC R-306 to MKK.

PAC, 17 APR 2025 to 12 JUN 2025

PAC, 17 APR 2025 to 12 JUN 2025