

APP CRS
276°


Rwy Idg
TDZE
875

12000
875
896

RNAV (RNP) Z RWY 27

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP AR APCH - GPS		MALSR	MISSED APPROACH: Climb to 3000 on track 276° SEMSE and on track 220° to AVIEW and hold.	
For uncompensated Baro-VNAV systems, procedure NA below -16° C or above 54° C. For inop ALS, increase RNP 0.23 all Cats visibility to 1½ SM and increase RNP 0.30 all Cats visibility to 1¾ SM.				
D-ATIS	CINCINNATI APP CON	CINCINNATI TOWER	GND CON	CLNC DEL
ARR 134.375	DEP 135.3	119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	121.7	127.175
		118.975 360.85 (RWY 18L/36R) 118.3 (RWYs 18C/36C, 09/27) 133.325 (RWY 18R/36L)		CPDLC

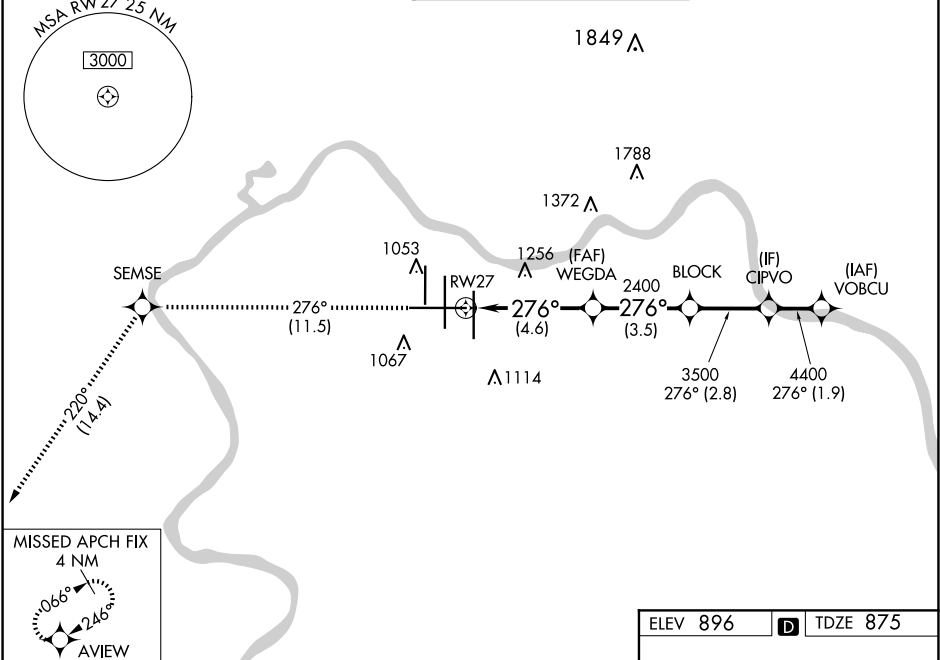

ELEV 896		TDZE 875
3000	SEMSE	AVIEW
tr 276°	tr 220°	
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 68).		
VOBUCU		
BLOCK		
CIPVO		
WEGDA		
RW27		
GP 3.00° TCH 55		
4.6 NM 3.5 NM 2.8 NM 1.9 NM		
CATEGORY	A	B
RNP 0.15 DA	1296/40	421 (500-¾)
RNP 0.23 DA	1378/55	503 (500-1)
RNP 0.30 DA	1445-1¼	570 (600-1¼)
AUTHORIZATION REQUIRED		
HIRL all Rwys TDZ/CL all Rwys except 27		