


24305

WAAS CH 56204 W06A	APP CRS 058°	Rwy Idg 9000 TDZE 773 Apt Elev 799
--	------------------------	---

RNAV (GPS) Y RWY 6L
CLEVELAND-HOPKINS INTL (CLE)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Circling Rwy 10 NA at night. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500 and increase LNAV Cats C/D visibility to 1% SM.				ALSF-2 Ⓐ		MISSED APPROACH: Climb to 3000 direct ACAPO and on track 001° to PASLE and hold.					
D-ATIS ARR 127.85 DEP 132.375		CLEVELAND APP CON 126.55 346.325		CLEVELAND TOWER 124.5 273.45		GND CON 121.7 273.45		CLNC DEL 125.05 273.45		CPDLC	

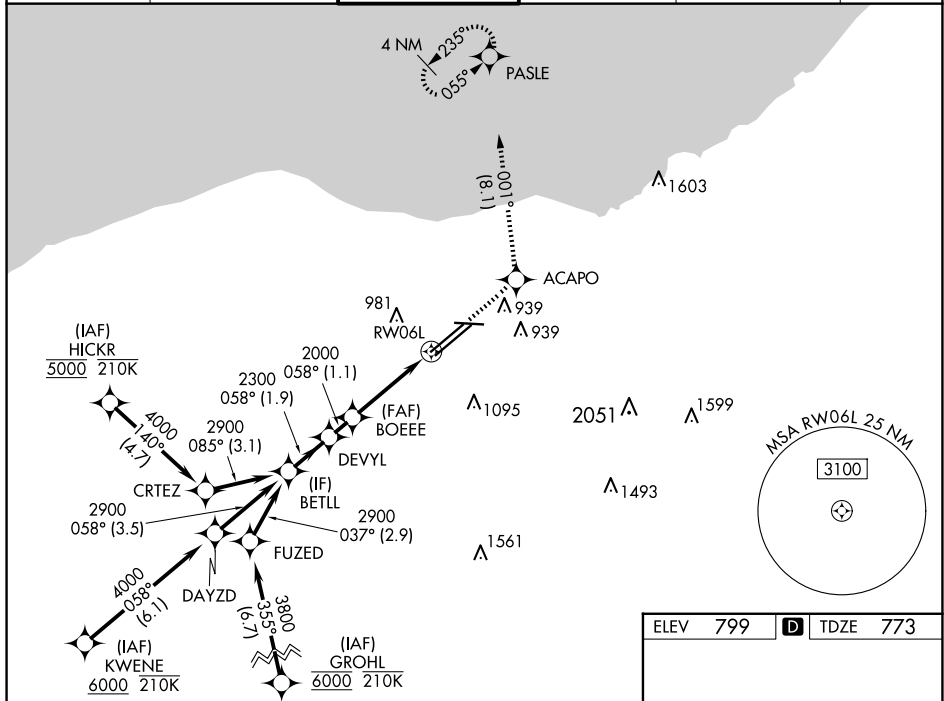

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).

CATEGORY	A	B	C	D
LPV DA	973/18 200 (200-½)			
LNAV/VNAV DA	1120/30 347 (400-⅝)			
LNAV MDA	1260/24 487 (500-½)		1260/50 487 (500-1)	
C CIRCLING	1420-1 621 (700-1)		1420-2 621 (700-2)	

REIL Rwy 10
TDZ/CL Rwy 6L, 6R, 24L, and 24R
HIRL Rwy 6L-24R, 6R-24L and 10-28

CLEVELAND, OHIO
Amdt 2A 21JUN18

41°25'N-81°51'W

CLEVELAND-HOPKINS INTL (CLE)
RNAV (GPS) Y RWY 6L

EC-2, 12 JUN 2025 to 10 JUL 2025