

OCALA, FLORIDA

AL-5055 (FAA)

25107

WAAS CH 90319 W18A	APP CRS 184°	Rwy Idg 6557 TDZE 80 Apt Elev 90
--	------------------------	---




RNAV (GPS) RWY 18
OCALA INTL-JIM TAYLOR FLD (OCF)

RNP APCH-GPS.

- T** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. **A** When local altimeter setting not received, use GNV altimeter setting and increase LPV DA to 361 feet and all visibilities $\frac{1}{8}$ SM; increase LNAV/VNAV DA to 595 feet and all visibilities $\frac{1}{8}$ SM, increase all MDA's 100 feet and LNAV visibility Cats C and D $\frac{1}{4}$ SM and Circling visibility Cats C and D $\frac{1}{2}$ SM. Baro-VNAV and VDP NA when using GNV altimeter setting.

MISSED APPROACH:
Climb to 2000 direct
TALZA and hold.

ATIS 128.125	JACKSONVILLE APP CON 118.6 251.15	OCALA TOWER ★ 119.25 (CTAF) 0	GND CON 121.4
------------------------	---	---	-------------------------

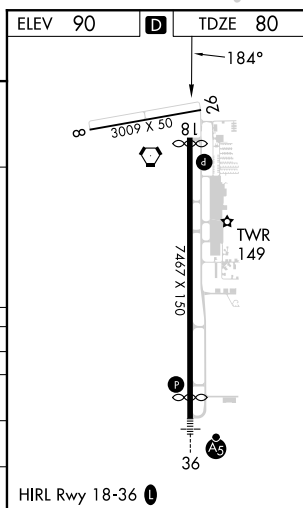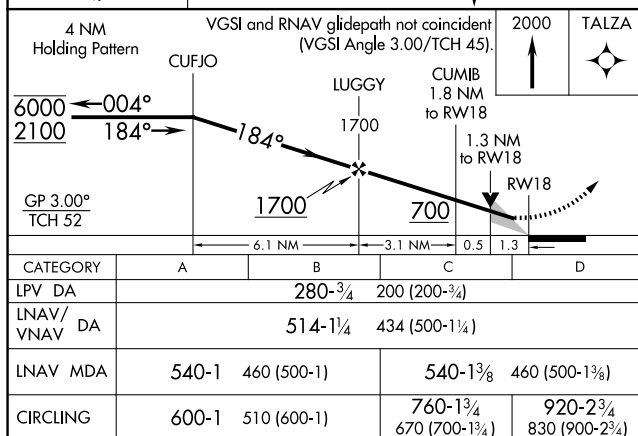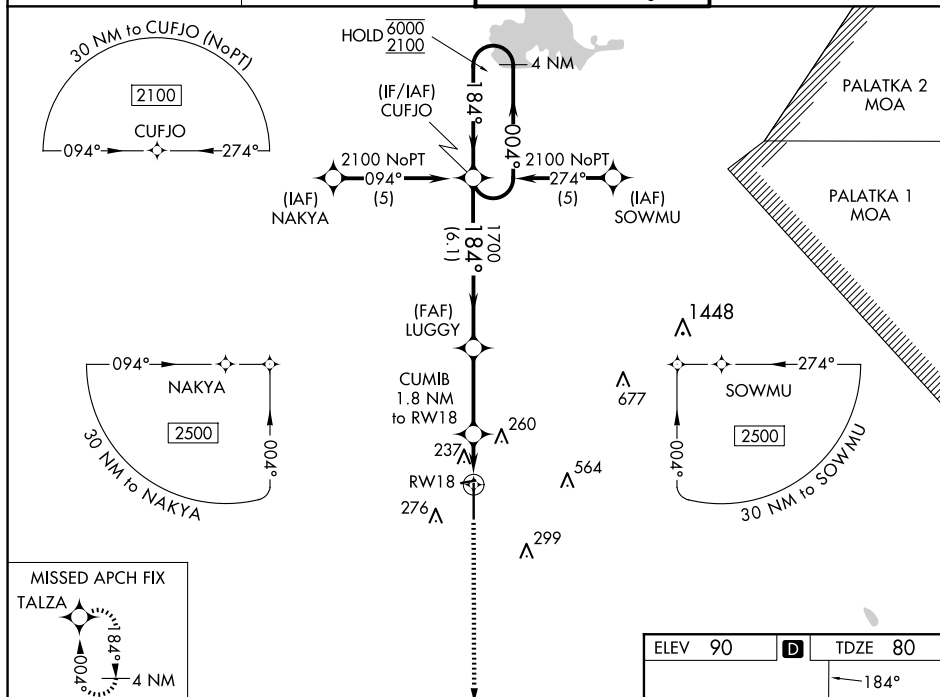

Ocala, Florida
Amdt 2C 17APR25

29°10'N-82°13'W

OCALA INTL-JIM TAYLOR FLD (OCF)
RNAV (GPS) RWY 18

SE-3, 12 JUN 2025 to 10 JUL 2025

SE-3, 12 JUN 2025 to 10 JUL 2025