
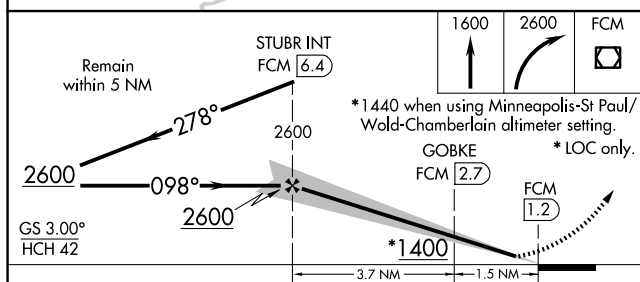


LOC I-FCM <u>109.7</u>	APP CRS 098°	Rwy ldg TDZE Apt Elev	5001 906 906
----------------------------------	------------------------	-----------------------------	---

COPTER ILS or LOC RWY 10R
FLYING CLOUD (FCM)

▼ For inoperative MALS/R, increase visibility to ½ mile. When local altimeter setting not received, use Minneapolis-St Paul Intl-Wold Chamberlain altimeter setting and increase DA 34 feet and all MDA 40 feet.	MALS/R 	MISSED APPROACH: Climb to 1600 then climbing right turn to 2600 direct FCM VOR/DME and hold, continue climb-in-hold to 2600.
--	--	--

ATIS 124.9	MINNEAPOLIS APP CON 134.7 284.7	FLYING CLOUD TOWER ★ 119.15 (CTAF) 0	GND CON 121.7	CLNC DEL 121.7 (When twr closed)	UNICOM 122.95
----------------------	---	--	-------------------------	---	-------------------------

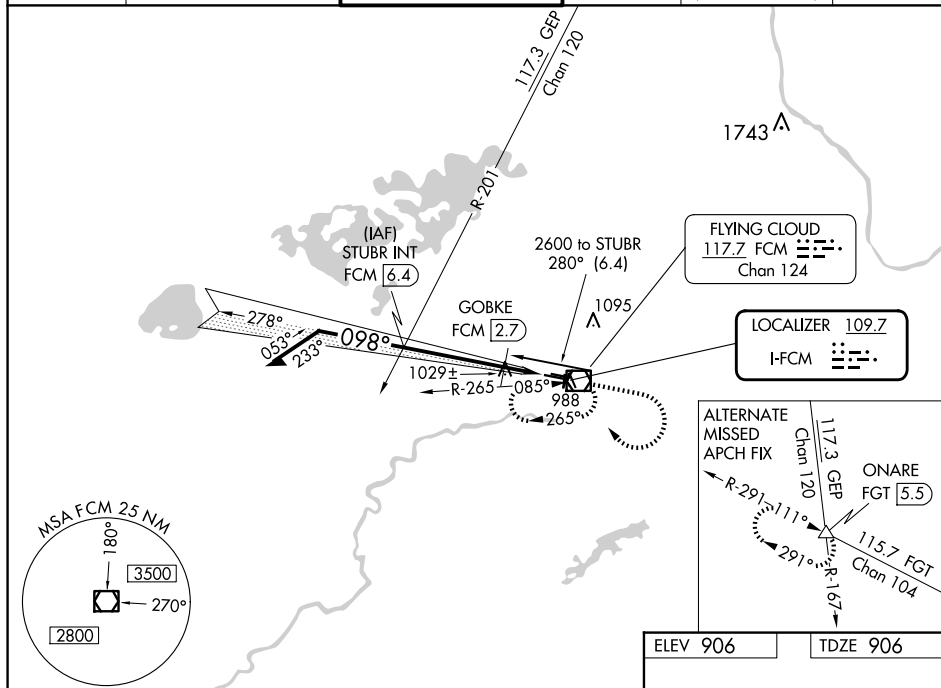

CATEGORY	COPTER
H-ILS 10R	1106- $\frac{1}{4}$ 200 (200- $\frac{1}{4}$)
H-LOC 10R	1400- $\frac{1}{4}$ 494 (500- $\frac{1}{4}$)
GOBKE FIX MINIMUMS (DME REQUIRED)	
H-LOC 10R	1280- $\frac{1}{4}$ 374 (400- $\frac{1}{4}$)

