

LOC/DME I-ANE  
**111.15**  
Chan **48 (Y)**

APP CRS  
**269°**

Rwy Idg **5000**  
TDZE **910**  
Apt Elev **912**

ILS or LOC RWY 27

ANOKA COUNTY/BLAINE (JANES FLD) (A.N.E.)

DME required. RADAR required for procedure entry at BLAYN.



⚠

VDP NA when using Crystal altimeter setting. When local altimeter setting not received, use Crystal altimeter setting and increase S-ILS 27 DA to 1131 feet; increase all MDAs 40 feet and S-LOC 27 visibility Cat C/D ¼ SM, and Circling visibility Cat D ¼ SM. For inop ALS when using Crystal altimeter setting, increase S-LOC 27 Cat C/D visibility to 1 ½ SM.

MALSR

MISSED APPROACH: Climb to 2700 direct GEP VORTAC and hold, continue climb-in-hold to 2700.

|                        |                                            |                                       |                          |                          |                                                |                         |
|------------------------|--------------------------------------------|---------------------------------------|--------------------------|--------------------------|------------------------------------------------|-------------------------|
| ATIS<br><b>120.625</b> | MINNEAPOLIS APP CON<br><b>126.5 335.65</b> | ANOKA TOWER★<br><b>132.4 (CTAF) 0</b> | GND CON<br><b>121.85</b> | CLNC DEL<br><b>121.3</b> | CLNC DEL<br><b>121.85</b><br>(When twr closed) | UNICOM<br><b>122.95</b> |
|------------------------|--------------------------------------------|---------------------------------------|--------------------------|--------------------------|------------------------------------------------|-------------------------|

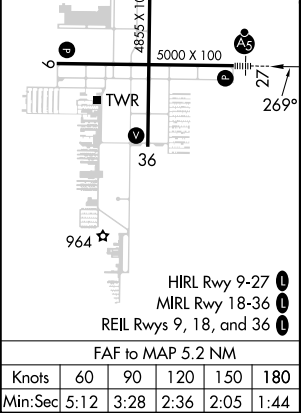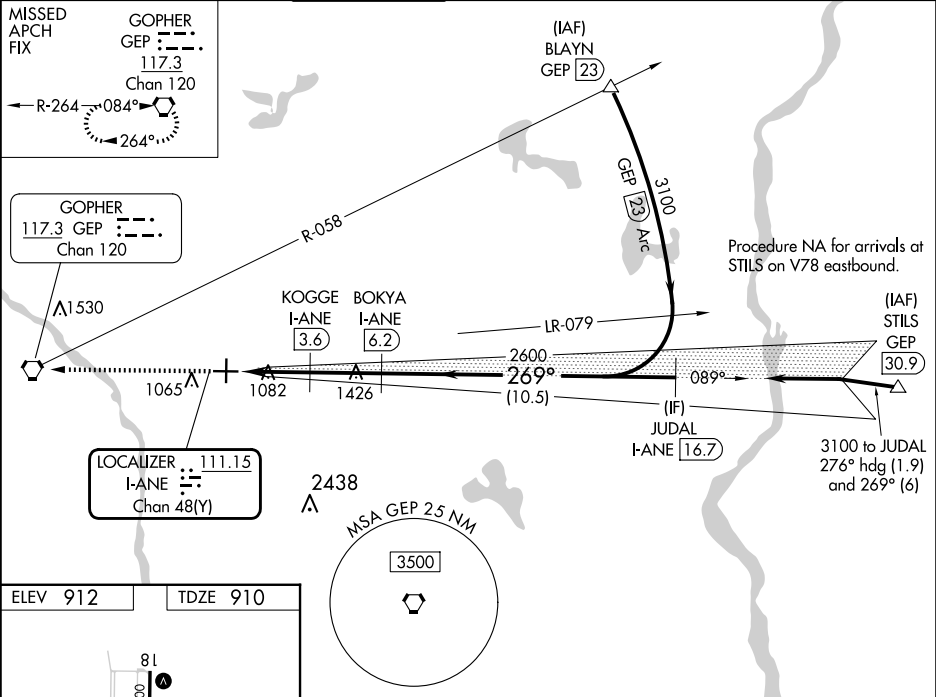

|          |                    |                                             |           |                 |                 |                  |
|----------|--------------------|---------------------------------------------|-----------|-----------------|-----------------|------------------|
| 2700     | GEP                | Use I-ANE DME when on the localizer course. |           |                 |                 | JUDAL I-ANE 16.7 |
|          |                    | I-ANE 1                                     | I-ANE 2.2 | KOGGE I-ANE 3.6 | BOKYA I-ANE 6.2 | 3100             |
|          |                    | 1.2 NM                                      | 1.4 NM    | 2.6 NM          | 10.5 NM         |                  |
| CATEGORY | A                  | B                                           | C         | D               |                 |                  |
| S-ILS 27 | 1110-½ 200 (200-½) |                                             |           |                 |                 |                  |
| S-LOC 27 | 1340-½             | 430 (500-½)                                 | 1340-¾    | 430 (500-¾)     |                 |                  |
| CIRCLING | 1400-1             | 488 (500-1)                                 | 1420-1½   | 508 (600-1½)    | 1580-2          | 668 (700-2)      |