TOP ALTITUDE: ASSIGNED BY ATC

RADAR required.

MINNEAPOLIS DEP CON
126.5 335.65
ATIS
120.625
CLNC DEL
121.3
CLNC DEL
121.85 (when twr closed)

TAKEOFF MINIMUMS

Rwy 9: Standard with minimum climb of 341′ per NM to 3000.
Rwy 18: Standard with minimum climb of 370′ per NM to 3000.
Rwy 27: Standard with minimum climb of 259′ per NM to 2800.
Rwy 36: Standard with minimum climb of 259′ per NM to 2800.

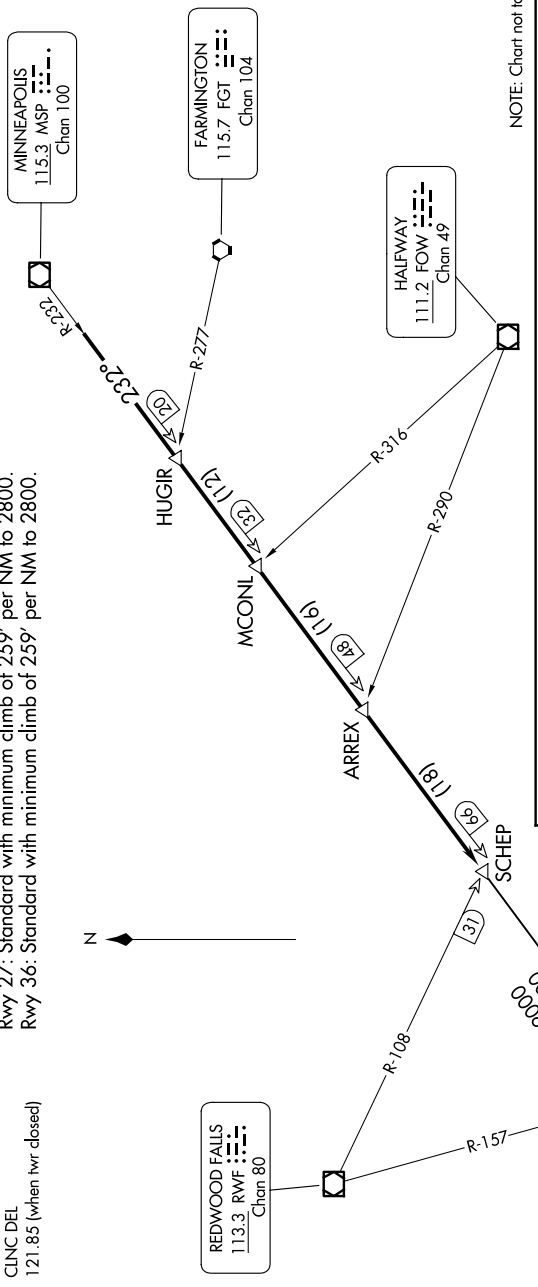

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF ALL RUNWAYS: Climb on assigned heading for RADAR vectors to assigned fix on MSP R-232, then on depicted route to SCHEP, then on transition. Maintain ATC assigned altitude. Expect filed altitude 10 minutes after departure.

RXANN TRANSITION (SCHEP1.RXANN): From over SCHEP INT on MSP R-232 to RXANN INT.

NC-1, 12 JUN 2025 to 10 JUL 2025