

LOC I-BPM 111.9	APP CRS 133°	Rwy Idg TDZE Apt Elev	7000 1031 1031
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 13
ST CLOUD RGNL (STC)


DME required.

⚠ For inop ALS when using Little Falls altimeter setting, increase S-ILS-13 all Cats visibility to 7/8 SM. When local altimeter setting not received, use Little Falls altimeter setting, increase DA to 1307 feet; increase all MDAs 80 feet and S-LOC 13 visibility Cats C and D 1/4 SM, and Circling visibility Cats C and D 1/4 SM. For inop ALS, increase S-LOC 13 Cats C and D visibility to 1 3/4 SM. DME from STC VOR/DME. DME use requires simultaneous reception of I-BPM and STC DME. VDP NA when using Little Falls altimeter setting.

MALSR

MISSED APPROACH: Climb to 2500 then climbing left turn to 5000 direct STC VOR/DME and on STC VOR/DME R-312 to SIYON/STC 14.5 DME and hold.

ATIS 119.375	MINNEAPOLIS CENTER 121.05 235.775	ST. CLOUD TOWER ★ 118.25 (CTAF) 0	GND CON 123.75
------------------------	---	---	--------------------------

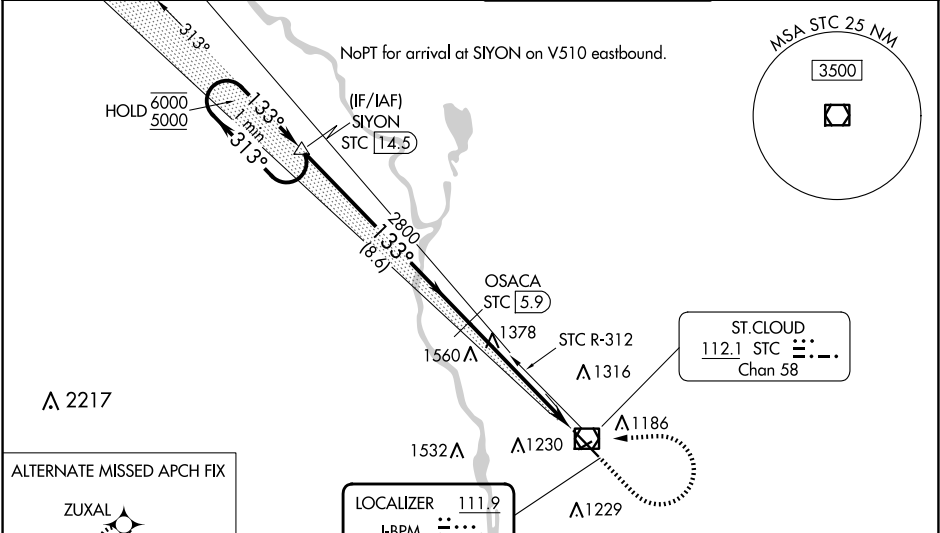

ELEV 1031 D TDZE 1031		SIYON	
One Minute Holding Pattern		OSACA STC 5.9	
6000 ← 313°		2800	
5000 ← 133°		2800	
GS 3.00°		STC 2.3	
TCH 49		8.6 NM	
		3.7 NM	
		1.8 NM	
CATEGORY	A	B	C
S-ILS 13	1231-1/2 200 (200-1/2)		
S-LOC 13	1640-1/2 609 (700-1/2)		
CIRCLING	1640-1 609 (700-1)		
		1640-1 3/4 609 (700-1 3/4)	
		1860-2 3/4 829 (900-2 3/4)	
		MIRL Rwy 5-23 0	
		HIRL Rwy 13-31 0	
		FAF to MAP 5.4 NM	
		Knots 60 90 120 150 180	
		Min:Sec 5:24 3:36 2:42 2:10 1:48	