

WAAS CH 82013 W13A	APP CRS 133°	Rwy Idg TDZE Apt Elev	7000 1031 1031
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13

ST CLOUD RGNL (STC)


RNP APCH - GPS.

Baro-VNAV and VDP NA when using Little Falls altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21 °C or above 54°C. When local altimeter setting not received, use Little Falls altimeter setting, increase LPV DA to 1307 feet; increase LNAV/VNAV DA to 1516 feet and all visibilities ¼ SM; increase all MDAs 80 feet and LNAV visibility Cat C and D ¼ SM, and Circling visibility Cat C and D ¼ SM. For inop ALS, increase LNAV/VNAV visibility all Cats and LNAV Cat C and D visibility to 1½ SM. When local altimeter not received and ALS inop, increase LPV visibility all Cats to ¾ SM, LNAV/VNAV visibility all Cats and LNAV Cat C and D to 1¾ SM.

MALSR

MISSED APPROACH:
Climb to 3000 direct ZUXAL and hold.

ATIS 119.375	MINNEAPOLIS CENTER 121.05 235.775	ST. CLOUD TOWER ★ 118.25 (CTAF) 0	GND CON 123.75
------------------------	---	---	--------------------------

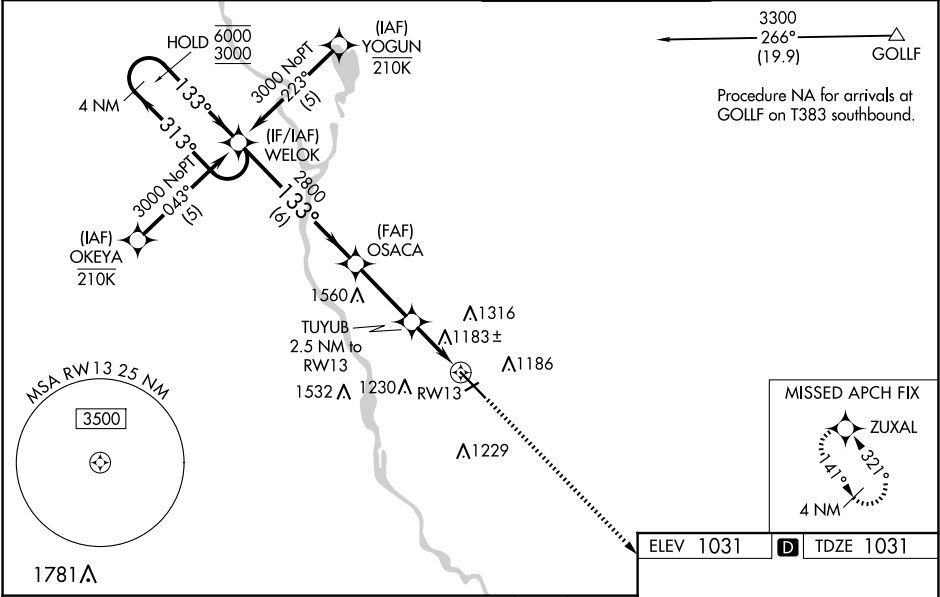

WELOK

4 NM Holding Pattern

6000
3000

←313°
133°→

GP 3.00°
TCH 49

OSACA

2800

1.1 NM to RW13

1.1 NM

1880

TUYUB

2.5 NM to RW13

1.4 NM

3000

ZUXAL

133°

CATEGORY	A	B	C	D
LPV DA	1231-½ 200 (200-½)			
LNAV/VNAV DA	1440-¾ 409 (500-¾)			
LNAV MDA	1440-½ 409 (500-½)	1440-¾ 409 (500-¾)		
CIRCLING	1500-1 469 (500-1)	1620-1½ 589 (600-1½)	1860-2¾ 829 (900-2¾)	

6 NM

2.9 NM

1.4 NM

1.1 NM

2800

1880

133°

322°

141°

4 NM

MISSED APCH FIX

ZUXAL

ELEV 1031

D

TDZE 1031

1081

TWR 1110

3000 X 75

1500 X 150

MIRL Rwy 5-23 0

HIRL Rwy 13-31 0