


WAAS CH 61213 W31A	APP CRS 313°	Rwy Idg 7000 TDZE 1020 Apt Elev 1031
--	------------------------	---

RNAV (GPS) RWY 31
ST CLOUD RGNL (STC)

RNP APCH - GPS.		 MALSR	MISSED APPROACH: Climb to 3000 direct WELOK and hold.
T Baro-VNAV and VDP NA when using Little Falls altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS when using Little Falls altimeter setting, increase LPV all Cats visibility to ½ SM and LNAV/VNAV all Cats visibility to 1 ½ SM and LNAV Cats C and D visibility to 1 ½ SM. When local altimeter setting not received, use Little Falls altimeter setting, increase LPV DA to 1296 feet, increase LNAV/VNAV DA to 1503 feet and all visibilities ¼ SM; increase all MDAs 80 feet and LNAV visibility Cat C and D ¼ SM, and Circling visibility Cat C and D ¼ SM. For inop ALS, increase LNAV/VNAV visibility all Cats to 1 ½ SM.			
ATIS 119.375	MINNEAPOLIS CENTER 121.05 235.775	ST. CLOUD TOWER ★ 118.25 (CTAF) 0	GND CON 123.75

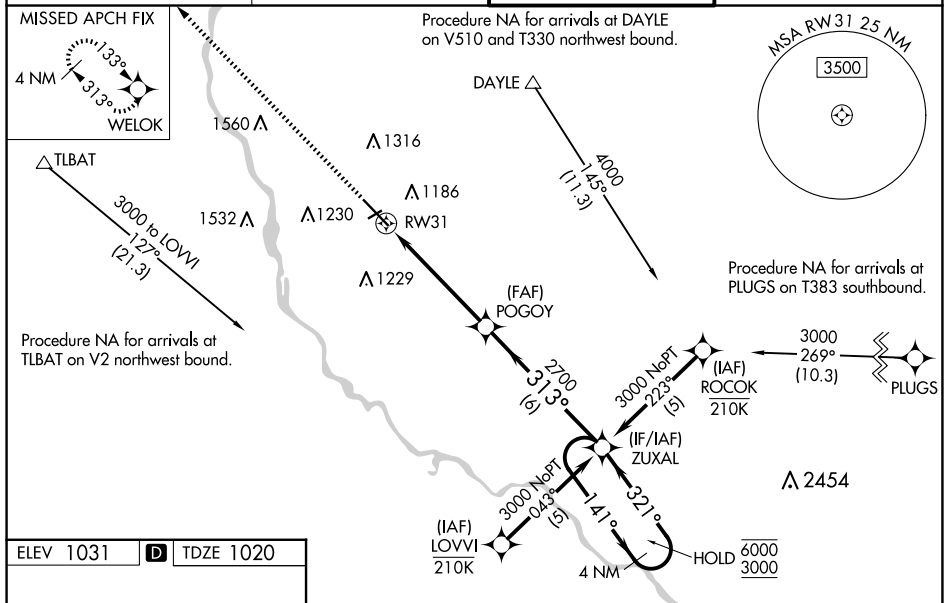

CATEGORY	A	B	C	D
LPV DA	1220-½	200 (200-½)		
LNAV/VNAV DA	1427-¾	407 (400-¾)		
LNAV MDA	1460-½	440 (500-½)	1460-¾	440 (500-¾)
CIRCLING	1500-1	469 (500-1)	1620-1½ 589 (600-1½)	1860-2¾ 829 (900-2¾)

MIRL Rwy 5-23
HIRL Rwy 13-31