


WAAS CH 69432 W06A	APP CRS 063°	Rwy Ldg TDZE 394 Apt Elev 394	7599
--	------------------------	---	-------------


RNAV (GPS) RWY 6
LEHIGH VALLEY INTL (ABE)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 3000 direct FONUP and hold.
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM. **RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS 126.975	ALLENTOWN APP CON 119.65 124.45 351.8	ALLENTOWN TOWER 120.5 257.95	GND CON 121.9 257.95	CLNC DEL 124.05 257.95
------------------------	---	--	--------------------------------	----------------------------------

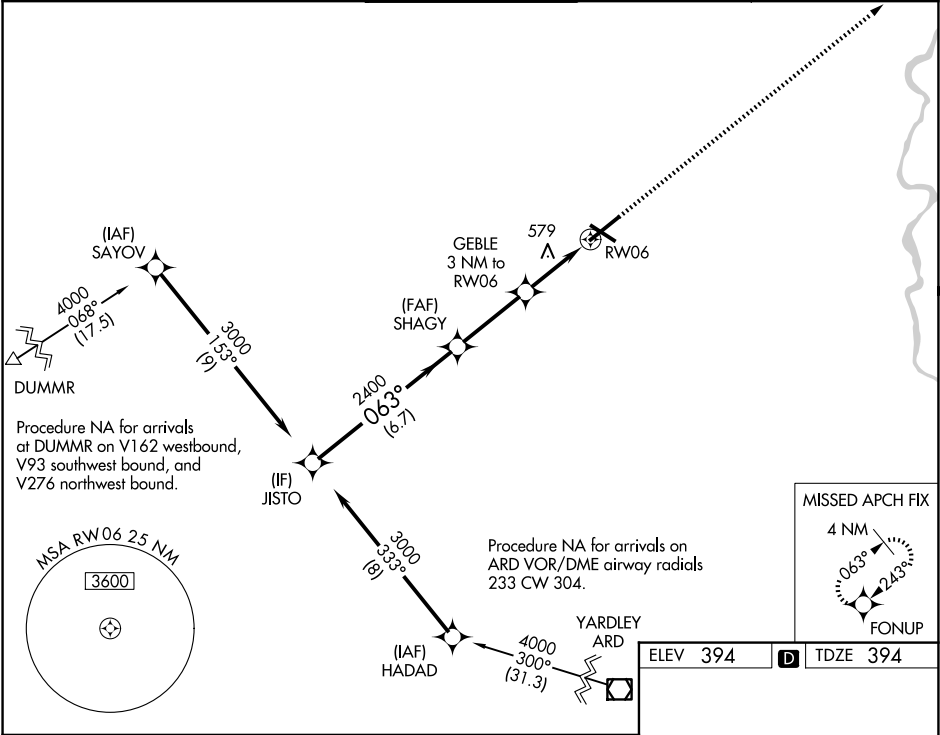

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).				
CATEGORY	A	B	C	D
LPV DA **	594/24 200 (200-½)			
LNAV/ DA VNAV	644/24 250 (300-½)			
LNAV MDA	840/24 446 (500-½)		840/45 446 (500-¾)	
CIRCLING	900-1 506 (600-1)		1180-2¼ 786 (800-2¼) 1600-3 1206 (1300-3)	

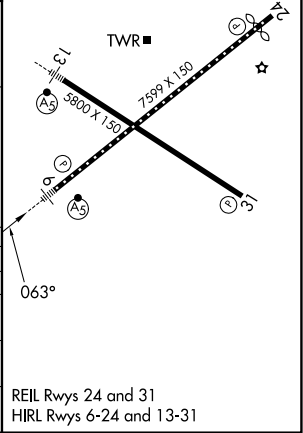

NE-4, 27 NOV 2025 to 25 DEC 2025

NE-4, 27 NOV 2025 to 25 DEC 2025