

AMARILLO, TEXAS

HI-VOR or TACAN RWY 4

VORTAC PNH 116.6 Chan 113	APCH CRS 037°	Rwy Idg 13,502 TDZE 3607 Arpt Elev 3607
---	-------------------------	--

[USAF]

RICK HUSBAND AMARILLO INTL (KAMA)

DME required

T * When ALS inop, increase CAT D vis to 1¼ miles;
CAT E vis to 1½ miles.
** When ALS inop, increase CAT CD vis to 1½ miles;
CAT E vis to 1¾ miles.



MISSED APPROACH: Climbing right turn to 5000 on heading 090° and PNH VORTAC R-118 to CALIDE/PNH 13 DME and hold

ATIS
118.85 350.3

AMARILLO APP CON
119.5 307.0

AMARILLO TOWER ★
118.3 (CTAF) **L** 257.9

GND CON
121.9 348.6

CLNC DEL
121.65 239.275

ASR


When local altimeter setting not received,
use Borger altimeter setting. _____

PANHANDLE
116.6 PNH
Chan 113

4075

• ← Λ_{5049}

P4/



4189

TRAD

ND

923

1

TEXICO
112.2 TXO 
Chan 59



(IAF)
DAUBS
PNH 33.7
FL180

EMERG SAFE ALT 100 NM 7500

VDP N/A when using
BORGER altimeter setting.


5000
hd
09

CAUDE
PNH
13

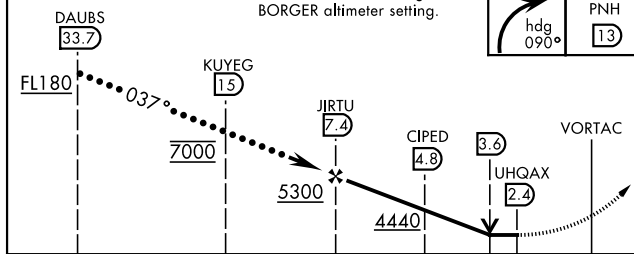

ELEV	3607	D	TDZE	3607
------	------	----------	------	------

CATEGORY	C	D	E
S-4 *	4040/40 433 (500-3)	4040/50 433 (500-1)	
C CIRCLING	4240-1¼ 633 (700-1¼)	4280-2¼ 673 (700-2¼)	4460-3 853 (900-3)
BORGER ALTIMETER SETTING			
S-4 **	4200-1¼	593	(600-1¼)
C CIRCLING	4400-2¼ 793 (900-2¼)	4440-2¾ 833 (900-2¾)	4620-3 1013 (1100-3)



AMARILLO, TEXAS

35°13'N-101°42'W

RICK HUSBAND AMARILLO INTL (KAMA)

Amdt 1A 05DEC19

HI-VOR or TACAN RWY 4