

WAAS CH 82319 W31A	APP CRS 310°	Rwy Ldg TDZE 7901 3601 Apt Elev 3607
--	------------------------	--

RNAV (GPS) Y RWY 31

RICK HUSBAND AMARILLO INTL (AMA)



▼


ASR

DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 46°C (116°F). When local altimeter setting not received, use Borger altimeter setting; increase DA to 4004 and all visibilities ½ mile; increase all MDA 160 feet and visibility Cat C and D ½ mile. Baro-VNAV and VDP NA when using Borger altimeter setting.

MISSED APPROACH: Climb to 6100 direct MOVEO and on track 317° to LANIT and hold.

ATIS 118.85 350.3	AMARILLO APP CON★ 119.5 307.0	AMARILLO TOWER★ 118.3 (CTAF) 257.9	GND CON 121.9 348.6	CLNC DEL 121.65 239.275	UNICOM 122.95
-----------------------------	---	---	-------------------------------	-----------------------------------	-------------------------

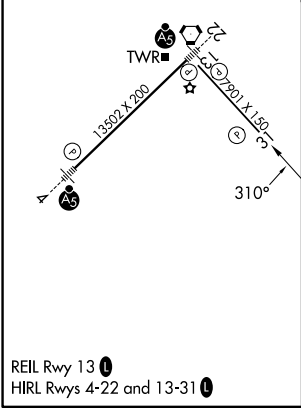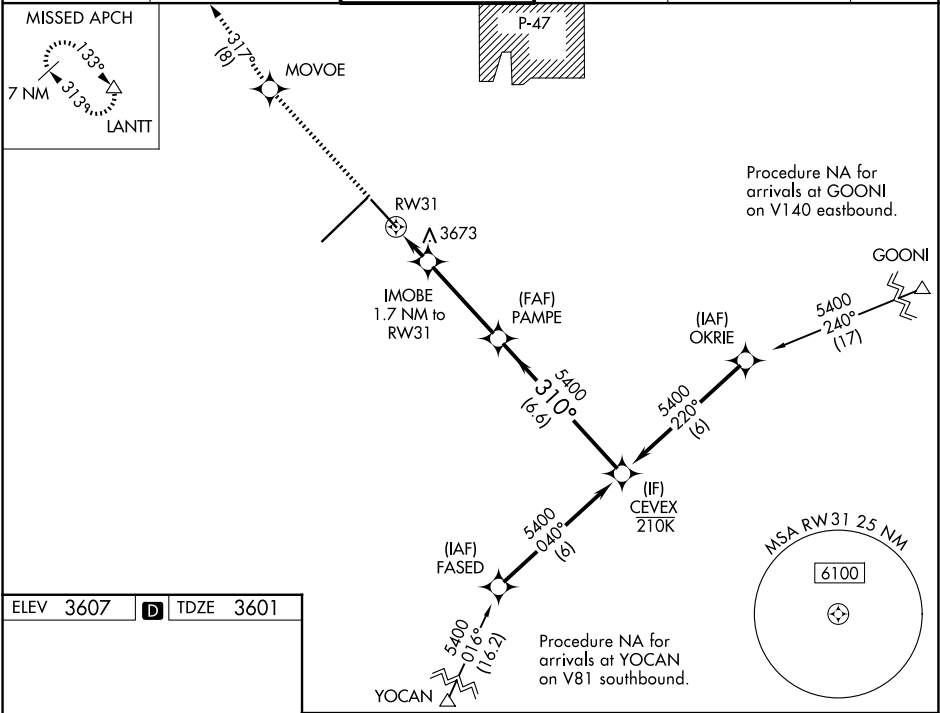

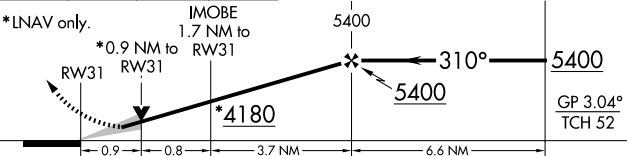6100	MOVEO	tr 317°	LANIT		
					
*LNAV only.					
					
CATEGORY		A	B	C	D
LPV	DA	3851-3/4 250 (300-3/4)			
LNAV/VNAV	DA	3851-3/4 250 (300-3/4)			
LNAV MDA		3940-1 339 (400-1)			
CIRCLING		4080-1	473 (500-1)	4240-1 3/4 633 (700-1 3/4)	4280-2 1/4 673 (700-2 1/4)