

ILS PRM RWY 27L
(CLOSE PARALLEL)


RADAR required for procedure entry.
DME or RADAR required.

ALSF-2





T Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. Dual VHF comm required. See additional requirements on AAUP.


MISSED APPROACH: Climb to 1500 then climbing left turn to 4000 on heading 265° and RMG VORTAC R-165 to DUTIE/RMG 31.3 DME/RADAR and hold.

[illegible]


CLNC DEL 118.1	CPDLC
-----------------------------	-------

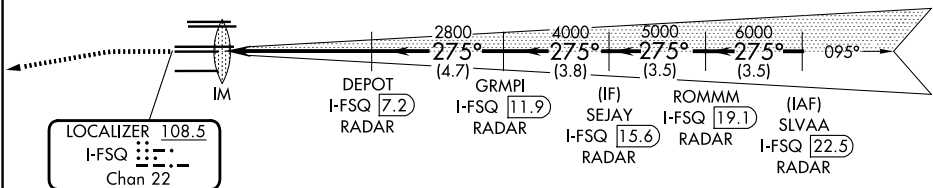

ELEV 1026	D	TDZE 999
-----------	----------	----------



HIRL all Rwys
TDZ/CL Rwys 8L, 9R,
10, 26R, 27L and 28

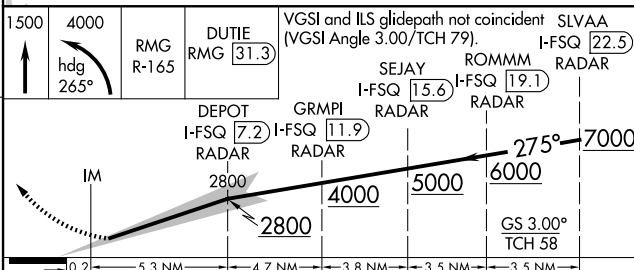

CATEGORY	A	B	C	D
S-ILS 27L	1199/18 200 (200-½)			