
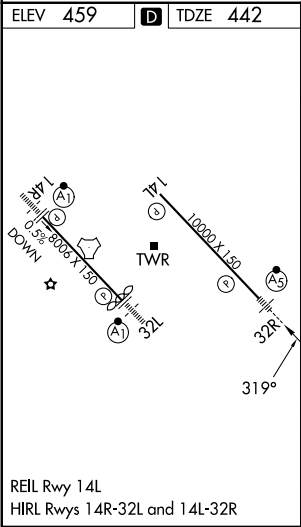



APP CRS	Rwy Ldg	10000
319°	TDZE	442
	Apt Elev	459

RNAV (RNP) Z RWY 32R

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

RNP AR APCH - GPS. Authorization required. From PLMAR, CURNN: RF		MALS R	MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct COFEY and hold.
For uncompensated Baro-VNAV systems, procedure NA below -15°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 4500.		AS	
ATIS 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8

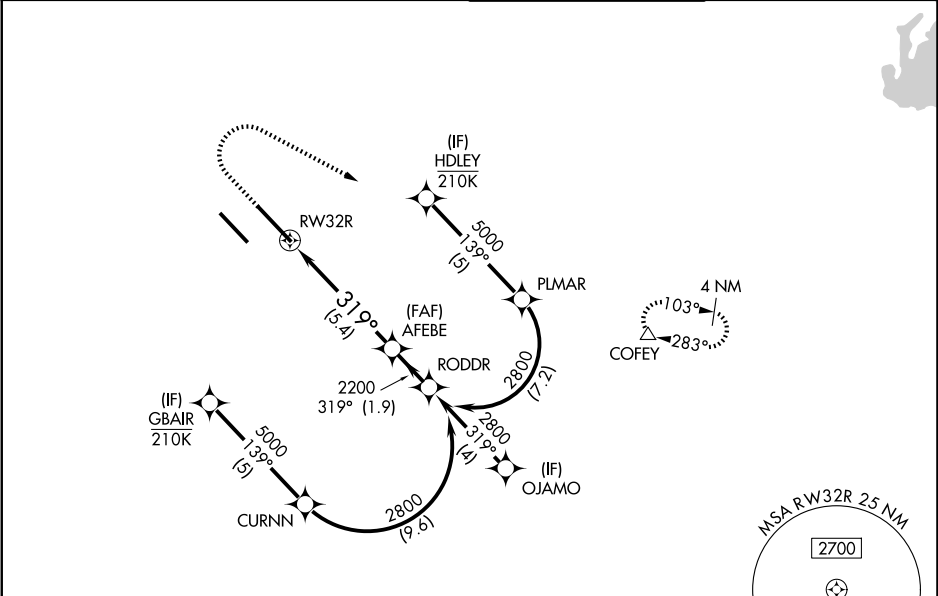

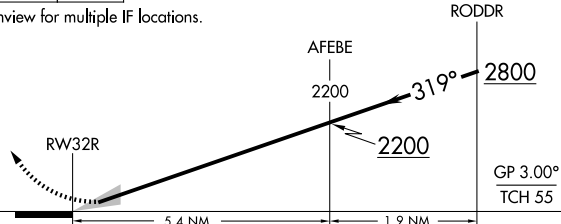1500	3000	COFEY	VGSI and RNAV glidepath not coincident [VGSI Angle 3.00/TCH 71].			
			See planview for multiple IF locations.			
						
CATEGORY	A		B		C	D
RNP 0.30 DA	747/24		305 (300-½)			
AUTHORIZATION REQUIRED						