

TACAN SKE Chan 59 (112.2)	APP CRS 134°	Rwy Ldg TDZE 459 Apt Elev 459
--	------------------------	---

TACAN RWY 14R


SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

For inop ALS, increase S-14R Cat E visibility to 1½ SM.

ALSF-1

MISSED APPROACH: Climb to 2400 on SKE R-142 to WOMUG/14.1 DME and hold.

ATIS 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8
----------------------------	--	------------------------------------	-------------------------------

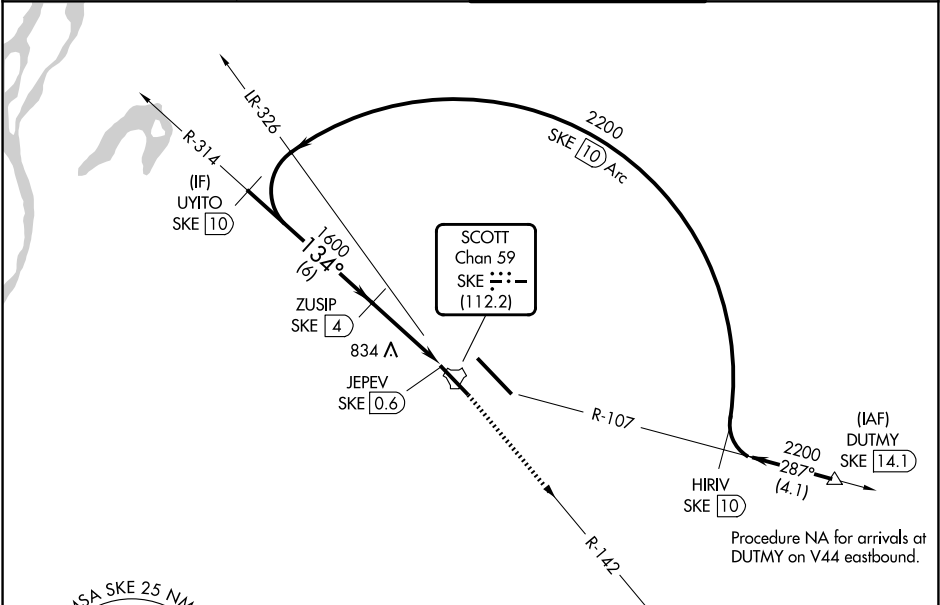

MSA SKE 25 NM

150°

2700

2200

060°

ESA W/IN 100 NM 3500

MISSED APCH FIX

SKE R-142

Chan 59

(112.2)

WOMUG

SKE (14.1)

322°

142°

ELEV 459

TDZE 459

UYITO SKE **10**

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 50).

2400

WOMUG SKE **14.1**

2200

134°

3.00°

TCH 65

1600

JEPEV SKE **0.6**

6 NM

1.5 NM

1.9 NM

CATEGORY	A	B	C	D	E
S-14R	1100/24	641 (700-½)	1100-1⅓	641 (700-1⅓)	
CIRCLING	1100-1 641 (700-1)	1120-1 661 (700-1)	1240-2¼ 781 (800-2¼)	1240-2½ 781 (800-2½)	1240-2¾ 781 (800-2¾)

REIL Rwy 14L

HIRL Rws 14L-32R and 14R-32L