

RNAV (GPS) RWY 22

APCH CRS 217°	Rwy Idg THRE Arpt Elev	6630 17 33
------------------	------------------------------	------------------

- (USAF)

KEESLER AFB (KBIX)

RNP APCH

T * When ALS inop, increase vis to 1 3/8 miles.
 ** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CD vis to 1 3/8 miles.

ALSF-1

MISSED APPROACH: Climb to 2200 direct CEDPO and track 175° to WAPGA. Expect ATC instructions.

ATIS★
281.55


GULFPORT APP CON/DEP CON★
124.6 354.1 130° - 309°
127.5 254.25 310° - 129°

TOWER★
120.75 269.075


GND CON★
121.8 275.8

CLNC DEL
121.8 275.8


For uncompensated
Baro-VNAV systems,
LNAV/VNAV NA below
8°C or above 54°C.

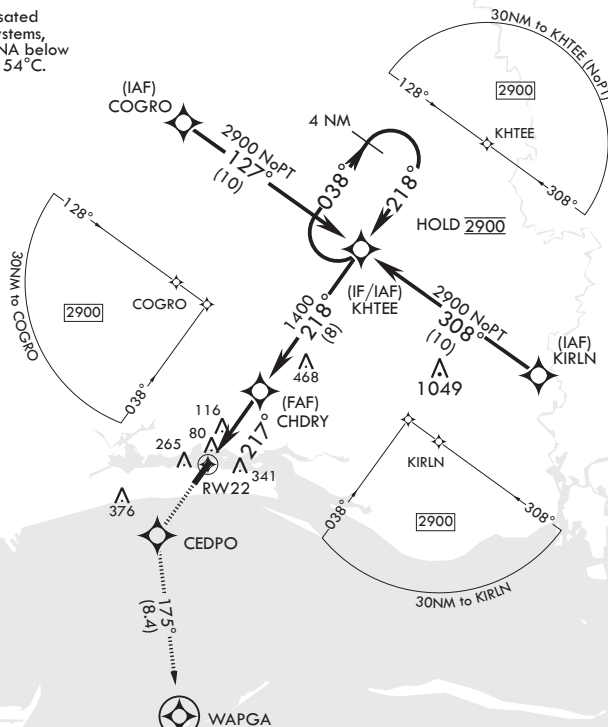

EMERG SAFE ALT 100 NM 3100

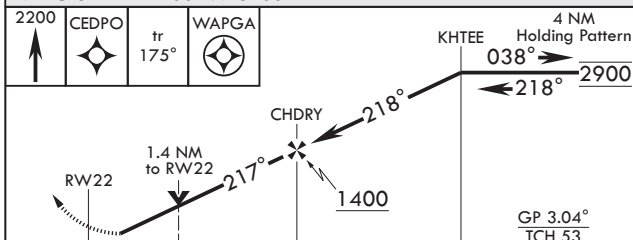

	4.1 NM						REF 55	
CATEGORY	A		B		C		D	
LNAV/VNAV DA*	520-1¼		503		(500-1¼)			
LNAV MDA**	520/40 503 (500-¾)		520-1¼ 503 (500-1¼)					
 CIRCLING	580-1 547 (600-1)		660-1 627 (700-1)		680-1¼ 647 (700-1¼)		680-2 647 (700-2)	

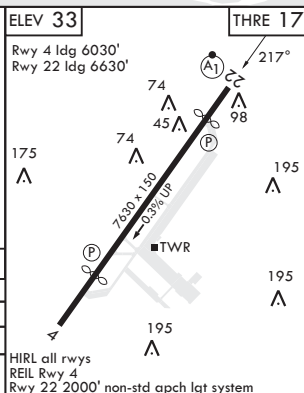

RNAV (GPS) RWY 22