

WAAS CH 53605 W24A	APP CRS 239°	Rwy Idg 10801 TDZE 641 Apt Elev 650
--	------------------------	--


RNAV (GPS) Y RWY 24
BIRMINGHAM-SHUTTLESWORTH INTL (BHM)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). Rwy 24 helicopter visibility reduction below RVR 4000 NA. DME/DME RNP-0.3 NA. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to 1½ SM and LNAV Cat A/B visibility to RVR 5500, and Cat C/D/E to 1¾ SM.
** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1300 then climbing right turn to 3000 direct CAPUN and hold.

ATIS 119.4 270.1	BIRMINGHAM APP CON 123.8 256.8	BIRMINGHAM TOWER 119.9 317.725	GND CON 121.7 348.6	CLNC DEL 125.675 305.2
----------------------------	--	--	-------------------------------	----------------------------------

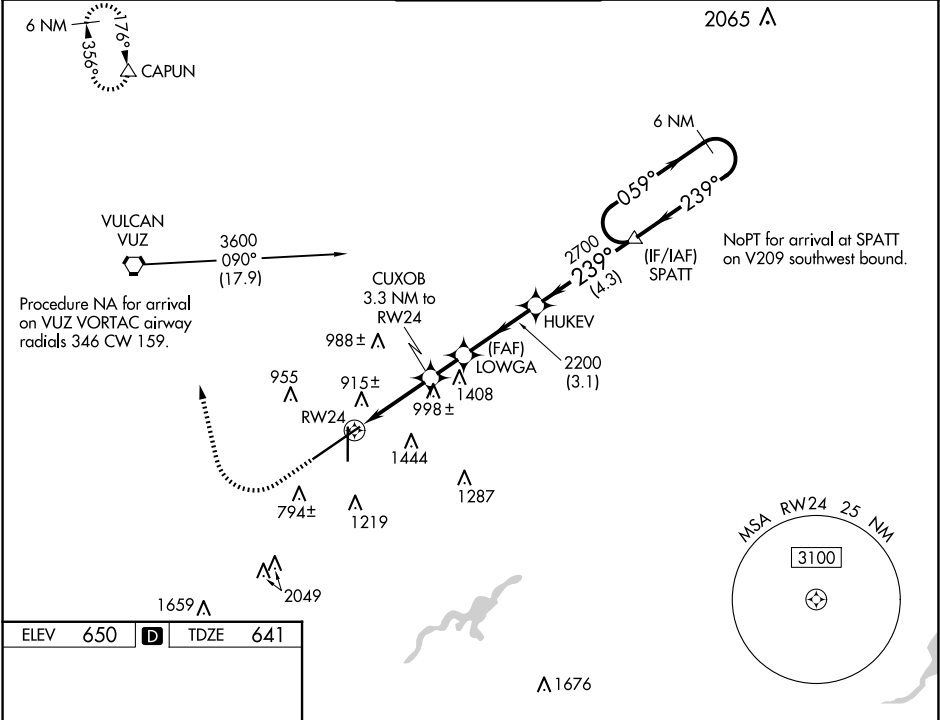

ELEV **650** **D** TDZE **641**

REIL Rwy 18 and 36
TDZ/CL Rwy 6
HIRL Rwy 6-24
MIRL Rwy 18-36

1300 3000 CAPUN

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).

6 NM Holding Pattern

SPATT

059° 239° 3300

GP 3.00° TCH 52

*LNAV only.

CUXOB 3.3 NM to RW24

LOWGA HUKEV

2200 2700

*1.7 NM to RW24

*1740

2200

1.7 NM 1.6 NM 1.4 NM 3.1 NM 4.3 NM

CATEGORY	A	B	C	D	E
LPV DA**	841/24 200 (200-½)				
LNAV/VNAV DA	1200-1½ 559 (600-1½)				
LNAV MDA	1260/40	619 (700-¾)	1260-1¾ 619 (700-1¾)		

SE-4, 27 NOV 2025 to 25 DEC 2025

SE-4, 27 NOV 2025 to 25 DEC 2025