

LOC I-BUF

111.3

APP CRS

235°

Rwy Ldg

7569

TDZE

726

Apt Elev

727

ILS or LOC RWY 23

BUFFALO NIAGARA INTL (BUF)

DME required. RNP APCH - GPS. ADF required for LOC only.


ALSF-2

MISSED APPROACH: Climb to 3000 direct WABUS and hold.

For inop ALS, increase S-LOC 23 Cats C and D visibility to RVR 6000.

A

D-ATIS 135.35	BUFFALO APP CON 126.15 263.125	BUFFALO TOWER 120.5 257.8	GND CON 133.2 257.8
------------------	-----------------------------------	------------------------------	------------------------

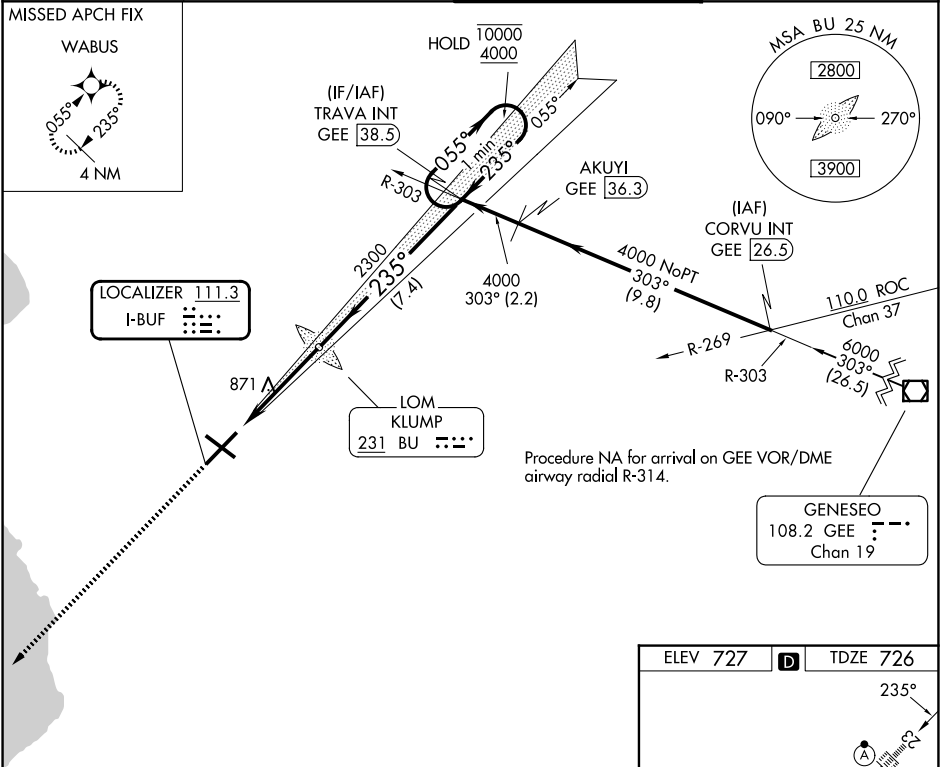

3000	WABUS	One Minute Holding Pattern			
		TRAVA INT GEE 38.5			
		GS 3.00° TCH 51			
CATEGORY	A	B	C	D	
S-ILS 23	926/18 200 (200-½)				
S-LOC 23	1140/24	414 (500-½)	1140/40	414 (500-¾)	
CIRCLING	1200-1	473 (500-1)	1220-1½ 493 (500-1½)	1340-2 613 (700-2)	

ELEV 727

TDZE 726

REIL Rwy 14
TDZL/RCLS Rwy 5 and 23
HIRL Rwy 5-23 and 14-32

FAF to MAP 4.4 NM

Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28