


APP CRS	Rwy Ldg	7569
235°	TDZE	726
	Apt Elev	727

RNAV (RNP) Z RWY 23

BUFFALO NIAGARA INTL (BUF')

RNP AR APCH.	ALSF-2	MISSED APPROACH: Climb to 3000 on the RNAV missed approach route to WABUS and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below -18°C or above 54°C. For inop ALSF, increase RNP 0.10 all Cats visibility to 1 ¼. For inop ALSF, increase RNP 0.20 all Cats visibility to 1 ½. For inop ALSF, increase RNP 0.30 all Cats visibility to 1 ¾.	⦿	

D-ATIS 135.35	BUFFALO APP CON 126.15 263.125	BUFFALO TOWER 120.5 257.8	GND CON 133.2 257.8
------------------	-----------------------------------	------------------------------	------------------------

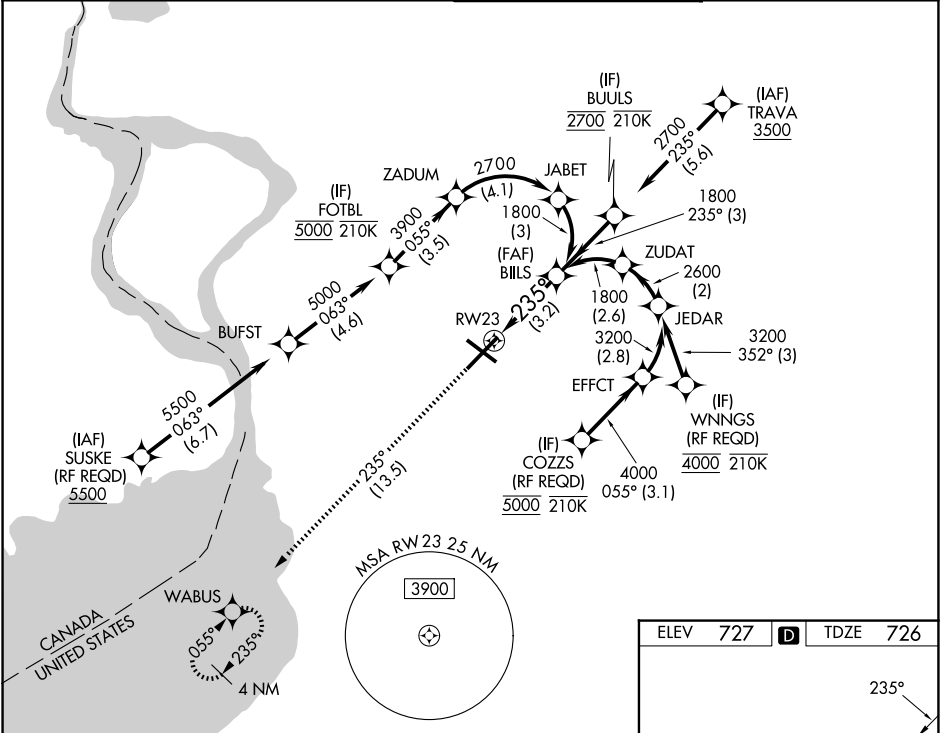

3000

↑

tr 235

WABUS

See planview for multiple IF locations.

RW23

1800

GP 3.00°

TCH 51

3.2 NM

CATEGORY	A	B	C	D
RNP 0.10 DA		1114/45	388 (400-7%)	
RNP 0.20 DA		1170/55	444 (500-1)	
RNP 0.30 DA		1228-1¼	502 (600-1¼)	

AUTHORIZATION REQUIRED

ELEV 727 TDZE 726

235°

2161 X 150

8829 X 150

20.0% UP

321

TWR

REIL Rwy 14
TDZL/RCLS Rwy 5 and 23
HIRL Rwy 5-23 and 14-32

NE-2, 27 NOV 2025 to 25 DEC 2025

NE-2, 27 NOV 2025 to 25 DEC 2025