
SE-2,

27 NOV 2025

ಠ 25

**DEC 2025** 

## WEAZL FIVE DEPARTURE (RNAV)

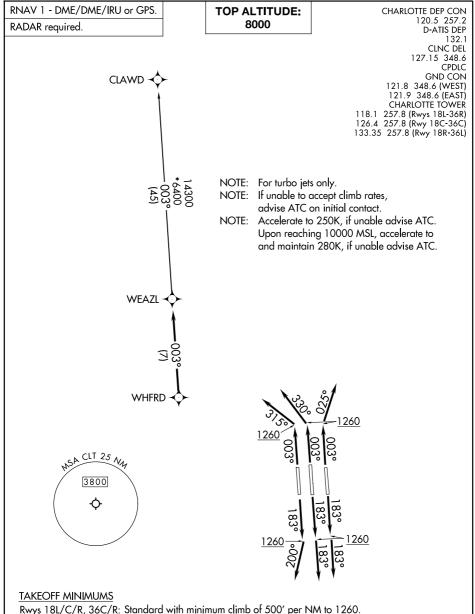

Rwy 36L: Standard with minimum climb of 500' per NM to 1400.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.



## DEPARTURE ROUTE DESCRIPTION SEE ADDITIONAL REQUIREMENTS ON AAUP

TAKEOFF RUNWAYS 18L/C: Climb on heading 183° to 1260, then on heading 183° or as assigned by ATC on RADAR vectors to WHFRD, thence. . .

TAKEOFF RUNWAY 18R: Climb on heading 183° to 1260, then on heading 200° or as assigned by ATC on RADAR vectors to WHFRD, thence. . .

TAKEOFF RUNWAY 36L: Climb on heading 003° to 1260, then on heading 315° or as assigned by ATC on RADAR vectors to WHFRD, thence. ..

TAKEOFF RUNWAY 36C: Climb on heading 003° to 1260, then on heading 330° or as assigned by ATC on RADAR vectors to WHFRD, thence. . .

TAKEOFF RUNWAY 36R: Climb on heading 003° to 1260, then on heading 025° or as assigned by ATC on RADAR vectors to WHFRD, thence. . .

. . . on track 003° to WEAZL, then on CLAWD Transition. Maintain 8000. Expect clearance to filed altitude within 10 minutes after departure.

## CLAWD TRANSITION (WEAZL5.CLAWD)