

CLEVELAND, OHIO


AL-84 (FAA)

25275

WAAS CH 81806 W06B	APP CRS 058°	Rwy Ldg 8029 TDZE 777 Apt Elev 799
--	------------------------	---

RNAV (GPS) Y RWY 6R
CLEVELAND-HOPKINS INTL (CLE)

RNP APCH.		MALSR 		MISSED APPROACH: Climb to 3000 direct MOMBE and on track 099° to NEIII and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 46°C (114°F). Circling Rwy 10 NA at night. For inop ALS, increase LNAV Cats C/D visibility to 1½ SM.				
D-ATIS 127.85	CLEVELAND APP CON 126.55 346.325	CLEVELAND TOWER 124.5 273.45		GND CON 121.7 273.45

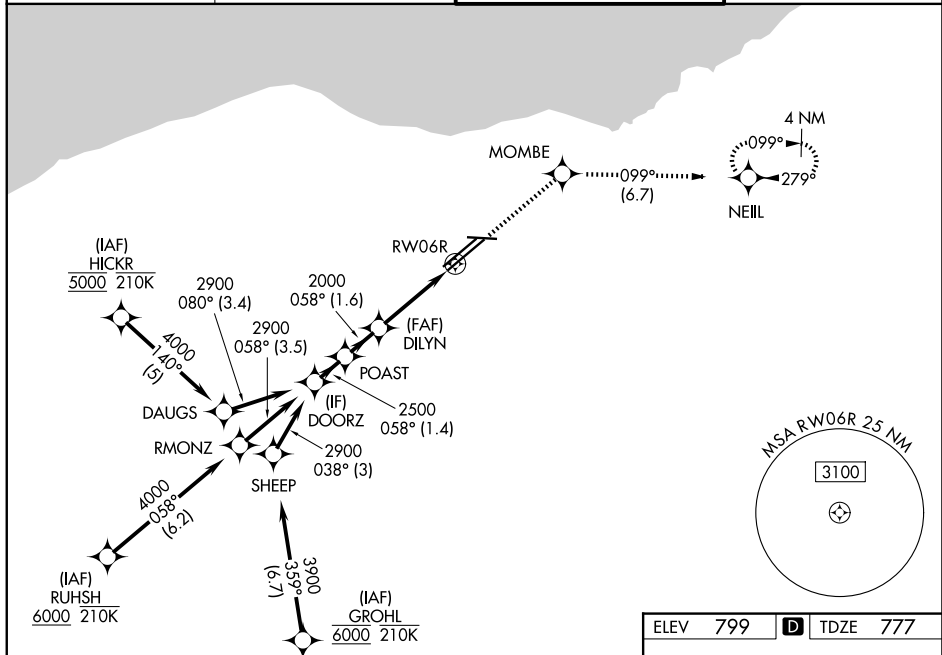

VGS and RNAV glidepath not coincident (VGS Angle 3.00/TCH 73).

DOORZ POAST DILYN

2900 0.58° 2500 2000

GP 3.10° TCH 58

1.4 NM 1.6 NM 2.2 NM 1.4 NM

*1.4 NM to RW06R

RW06R

3000 MOMB tr 099° NEIL

*RNAV only.

CATEGORY	A	B	C	D
LPV DA	977/18		200 (200-½)	
RNAV/VNAV DA	1227/45		450 (500-¾)	
RNAV MDA	1260/24	483 (500-½)	1260/50	483 (500-1)
CIRCLING	1420-1	621 (700-1)	1420-1¾ 621 (700-1¾)	1420-2 621 (700-2)

REIL Rwy 10
TDZ/CL Rwy 6L, 6R, 24L, and 24R
HIRL Rws 6L-24R, 6R-24L and 10-28

CLEVELAND, OHIO
Amdt 3 24MAY18

41°25'N-81°51'W

CLEVELAND-HOPKINS INTL (CLE)
RNAV (GPS) Y RWY 6R

EC-2, 27 NOV 2025 to 25 DEC 2025

EC-2, 27 NOV 2025 to 25 DEC 2025