


LOC/DME I-AHI	APP CRS	Rwy Ldg
109.1	352°	13500
Chan 28		TDZE 6118
		Apt Elev 6187



ILS or LOC RWY 35R
CITY OF COLORADO SPRINGS MUNI (COS)

⚠ ⚠ RADAR required when R-2601 in use.	MISSED APPROACH: Climb to 6700 then climbing right turn to 9000 on heading 047° and on BRK VOR/DME R-091 to ADANE INT/BRK 11.1 DME and hold.
--	--


ATIS 125.0 254.3	SPRINGS APP CON 124.0 257.875	SPRINGS TOWER 119.9 360.6	GND CON 121.7 348.6	CLNC DEL 134.45 363.125
----------------------------	---	-------------------------------------	-------------------------------	-----------------------------------

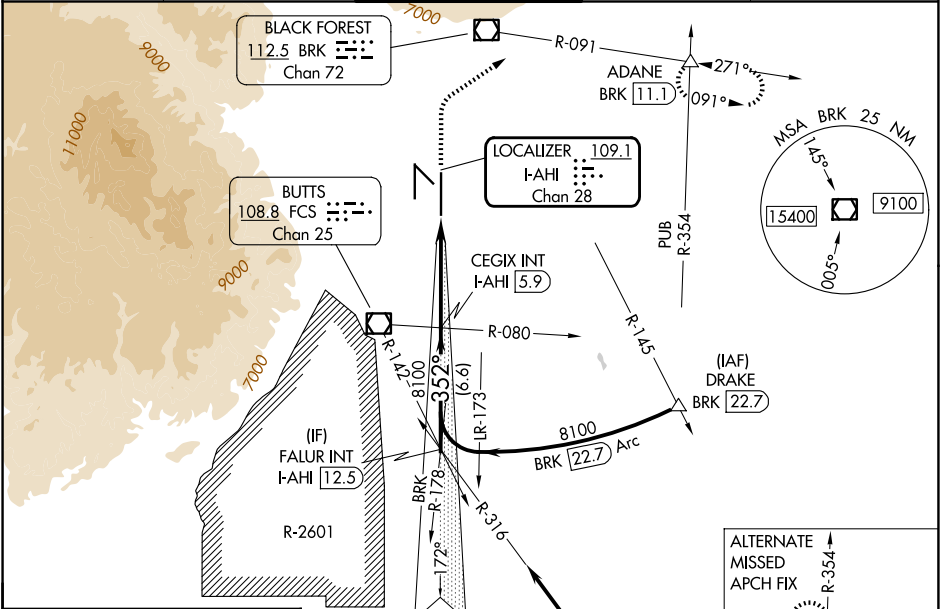

ELEV 6187	D TDZE 6118
MIRL Rwy 13-31	
HIRL Rws 17R-35L and 17L-35R	
REIL Rws 13, 17R, 31 and 35R	
TDZ/CL Rws 17L and 35R	

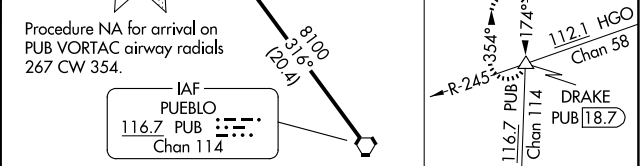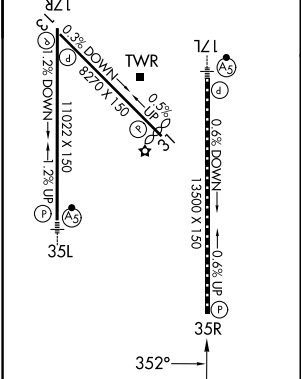

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).	6700	9000	ADANE
FALUR INT I-AHI 12.5	CEGIX INT I-AHI 5.9	BRK R-091	△

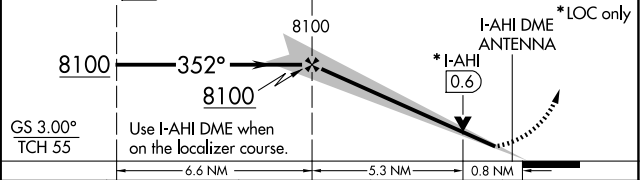

CATEGORY	A	B	C	D
S-ILS 35R	6318/40 200 (200-¾)			
S-LOC 35R	6420/55 302 (300-1)	6420/45 302 (300-¾)		
CIRCLING	6740-1 553 (600-1)	6800-1 613 (700-1)	7040-2½ 853 (900-2½)	7260-3 1073 (1100-3)

SW-1, 27 NOV 2025 to 25 DEC 2025

SW-1, 27 NOV 2025 to 25 DEC 2025