


|                                        |                        |                                                     |              |
|----------------------------------------|------------------------|-----------------------------------------------------|--------------|
| WAAS<br>CH <b>69618</b><br><b>W17A</b> | APP CRS<br><b>172°</b> | Rwy Ldg<br>TDZE <b>6187</b><br>Apt Elev <b>6187</b> | <b>13500</b> |
|----------------------------------------|------------------------|-----------------------------------------------------|--------------|

RNAV (GPS) Y RWY 17L  
CITY OF COLORADO SPRINGS MUNI (COS)

|                                                                                                                                                                   |                                         |                                                                                            |                                                                                  |                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|--------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|-----------------------------------|
| RNP APCH - GPS.<br>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 44°C. For inop MALSR, increase LNAV Cat C/D visibility to 2½ SM.<br>▲ |                                         | MALSR<br> | MISSED APPROACH: Climb to 9000 direct CEGIX and on track 100° to DRAKE and hold. |                                   |
| ATIS<br><b>125.0 254.3</b>                                                                                                                                        | SPRINGS APP CON<br><b>124.0 257.875</b> | SPRINGS TOWER<br><b>119.9 360.6</b>                                                        |                                                                                  | GND CON<br><b>121.7 348.6</b>     |
|                                                                                                                                                                   |                                         |                                                                                            |                                                                                  | CLNC DEL<br><b>134.45 363.125</b> |

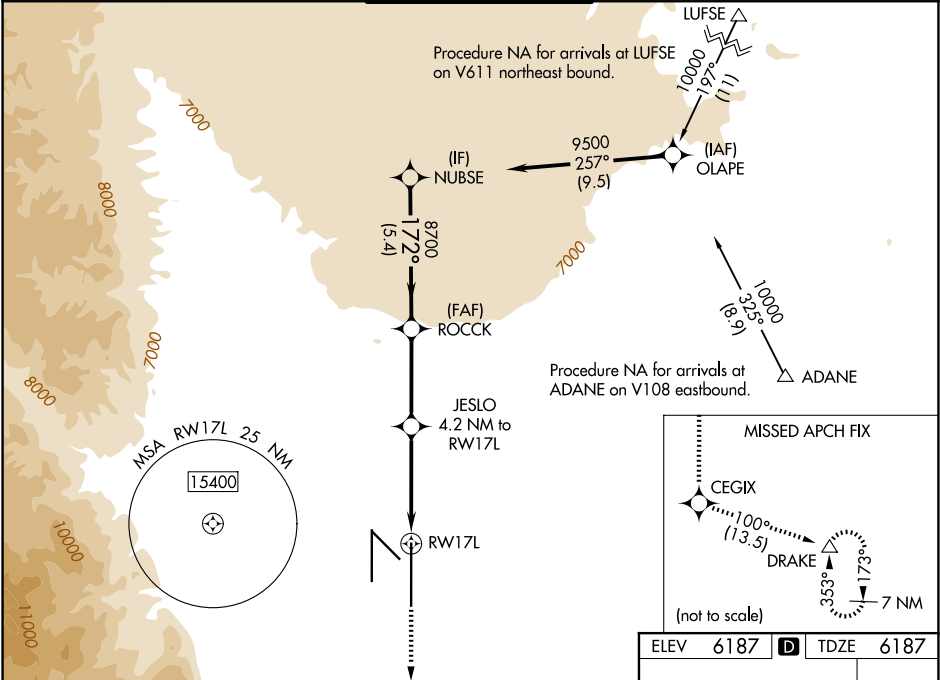

|                         |                        |                         |                         |
|-------------------------|------------------------|-------------------------|-------------------------|
| 9000                    | CEGIX                  | tr 100°                 | DRAKE                   |
|                         |                        |                         |                         |
| JESLO 4.2 NM to RWY 17L |                        |                         |                         |
| ROCCK 8700              |                        |                         |                         |
| NUBSE 9500              |                        |                         |                         |
| GP 3.00° TCH 57         |                        |                         |                         |
| CATEGORY                | A                      | B                       | C                       |
| LPV DA                  | 6387/18                | 200 (200-½)             |                         |
| LNAV/VNAV DA            | 6602/45                | 415 (500-¾)             |                         |
| LNAV MDA                | 7000/24<br>813 (900-½) | 7000/40<br>813 (900-¾)  | 7000-1⅞ 813 (900-1⅞)    |
| CIRCLING                | 7000-1¼ 813 (900-1¼)   | 7040-2½<br>853 (900-2½) | 7260-3<br>1073 (1100-3) |

