

RNAV (RNP) W RWY 13R
DALLAS LOVE FLD (DAL)

APP CRS
133°

Rwy Ldg	8310
TDZE	478
Apt Elev	487



For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). Simultaneous approach authorized. RF required. GPS required. Use of FD or AP providing RNAV track guidance required during simultaneous operations.




MISSED APPROACH: Climb to 3000 direct ENAVE and on track 151° to TACKE and hold.

D-ATIS
120.15

LONE STAR APP CON
124.3 282.275 (N)
125.2 343.65 (S)

LOVE TOWER
123.7 239.3



GND CON
121.75 348.6

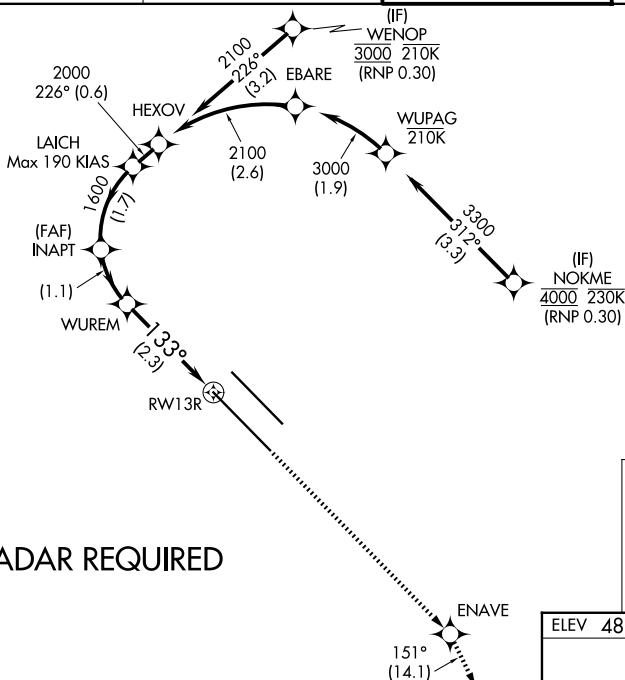

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 52).



See planview for multiple IF locations.

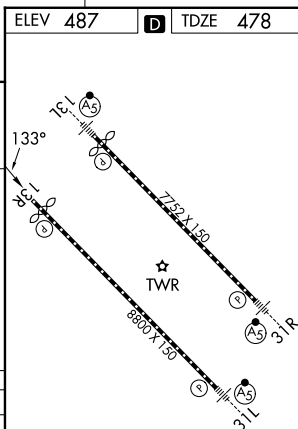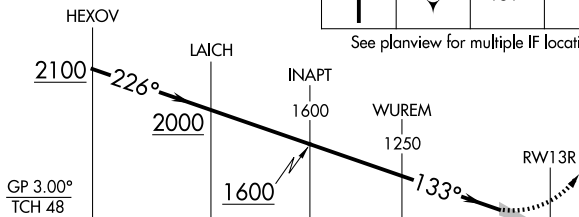

	0.6 NM	1.7 NM	1.1 NM	2.3 NM	
CATEGORY	A	B	C	D	
RNP 0.20 DA		781/50	303 (300-1)		
RNP 0.25 DA		833/60	355 (400-1¼)		
RNP 0.30 DA		929-1½	451 (500-1½)		