

WAAS CH 87123 W31B	APP CRS 313°	Rwy Ldg 6952 TDZE 487 Apt Elev 487
--	------------------------	---

RNAV (GPS) Y RWY 31R

DALLAS LOVE FLD (DAL)

RNP APCH-GPS

⚠

Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS, increase LNAV visibility Cat C/D to 1½ SM. ** RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

AS


MISSED APPROACH:

Climb to 1000 then climbing right turn to 5000 direct FINGR and hold.


D-ATIS 120.15	LONE STAR APP CON 124.3 282.275 (N) 125.2 343.65 (S)	LOVE TOWER 123.7 239.3	GND CON 121.75 348.6
-------------------------	--	----------------------------------	--------------------------------

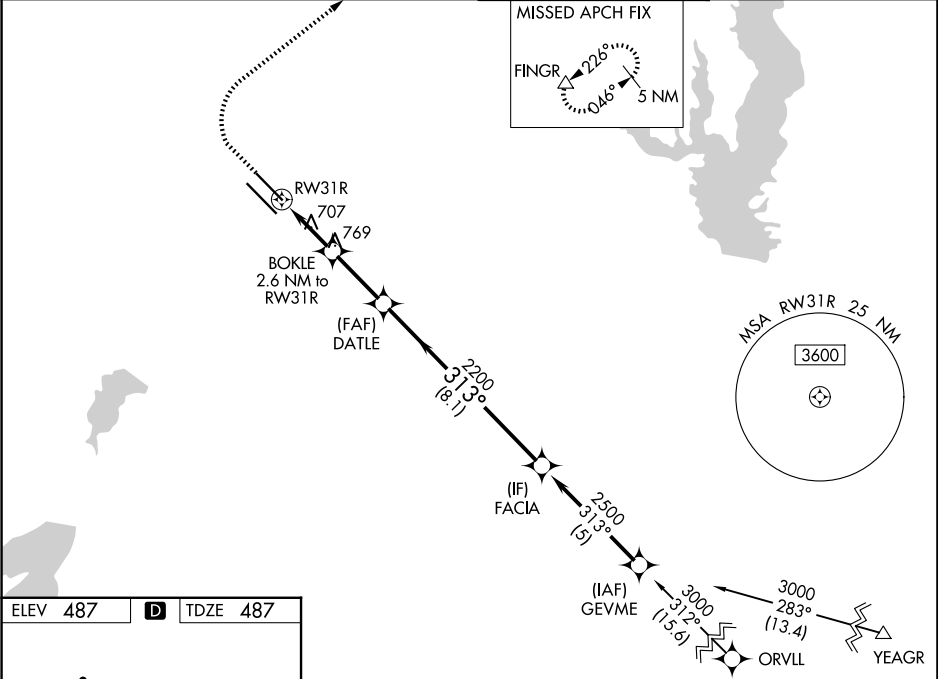

ELEV 487	D	TDZE 487
-----------------	----------	-----------------

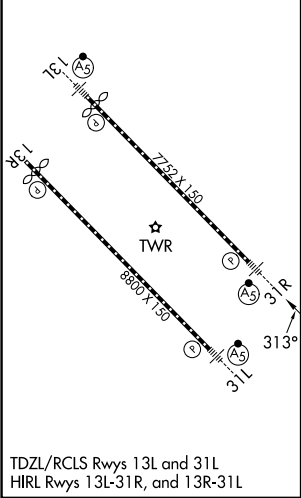

TDZL/RCLS Rwy 13L and 31L
HIRL Rwy 13L-31R, and 13R-31L

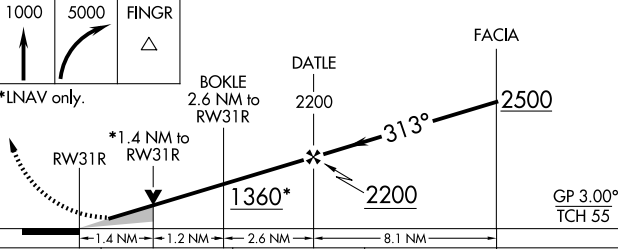1000	5000	FINGR			
					
*LNAV only.					
					
CATEGORY	A		B	C	D
LPV DA **	687/24		200 (200-½)		
LNAV/VNAV DA	873/35		386 (400-¾)		
LNAV MDA	980/24	493 (500-½)	980/50	493 (500-1)	
CIRCLING	1080-1 593 (600-1)	1140-1 653 (700-1)	1220-2 733 (800-2)	1520-3 1033 (1100-3)	