


APP CRS	Rwy Ldg	9025
085°	TDZE	3940
	Apt Elev	3962


RNAV (RNP) Y RWY 8R

EL PASO INTL (ELP)

RNP AR APCH. RF required.	MISSED APPROACH: Climb to 4400 then climbing right turn to 7500 direct FABAN and hold.
T For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C.	

D-ATIS 120.0 254.3	EL PASO APP CON 124.25 298.85	EL PASO TOWER 118.3 239.275	GND CON 121.9 348.6	CLNC DEL 125.0 379.1
-----------------------	----------------------------------	--------------------------------	------------------------	-------------------------

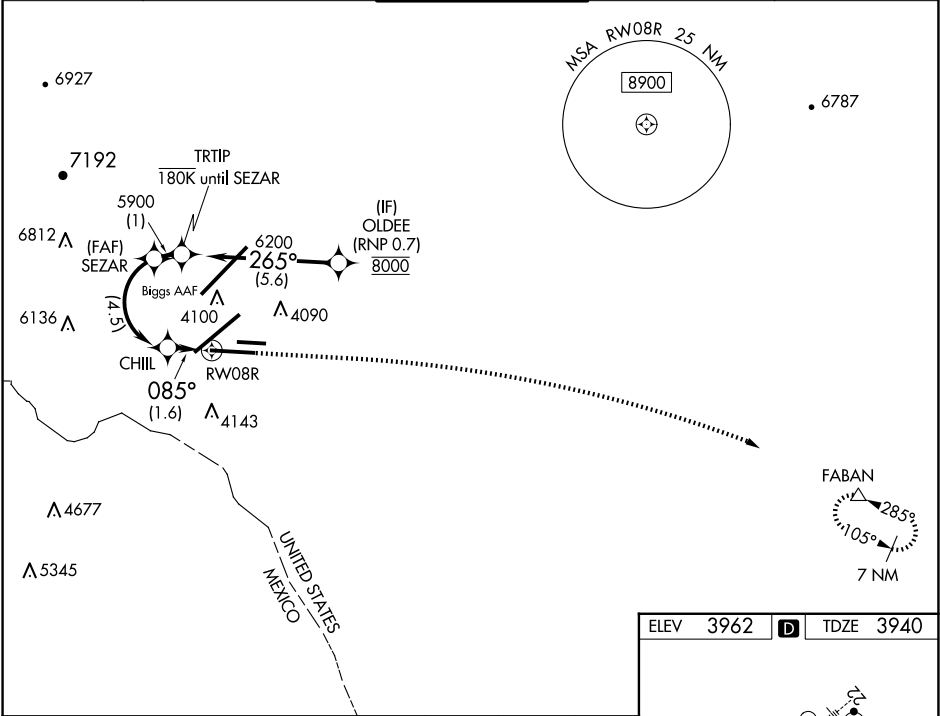

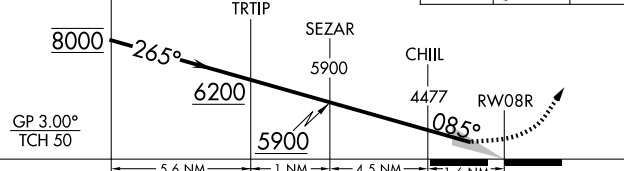VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 75).					4400 ↑		7500 		FABAN △	
										
CATEGORY	A		B		C				D	
RNP 0.20 DA	4193-¾				253 (300-¾)					
RNP 0.30 DA	4234-⅞				294 (300-⅞)					
AUTHORIZATION REQUIRED										

