

APP CRS
265°

Rwy Ldg TDZE
9025 3962
Apt Elev 3962

RNAV (RNP) Z RWY 26L
EL PASO INTL (ELP)


ASR

For uncompensated Baro-VNAV systems, procedure NA below -8°C (18°F) or above 50°C (122°F). For inop MALS, increase RNP 0.30 visibility all Cats to 1 mile. GPS Required.

MALS

MISSED APPROACH: Climb to 4400, then climbing right turn to 7500 direct FABAN and hold.

D-ATIS 120.0 254.3	EL PASO APP CON 124.25 298.85	EL PASO TOWER 118.3 239.275	GND CON 121.9 348.6	CLNC DEL 125.0 379.1
-----------------------	----------------------------------	--------------------------------	------------------------	-------------------------

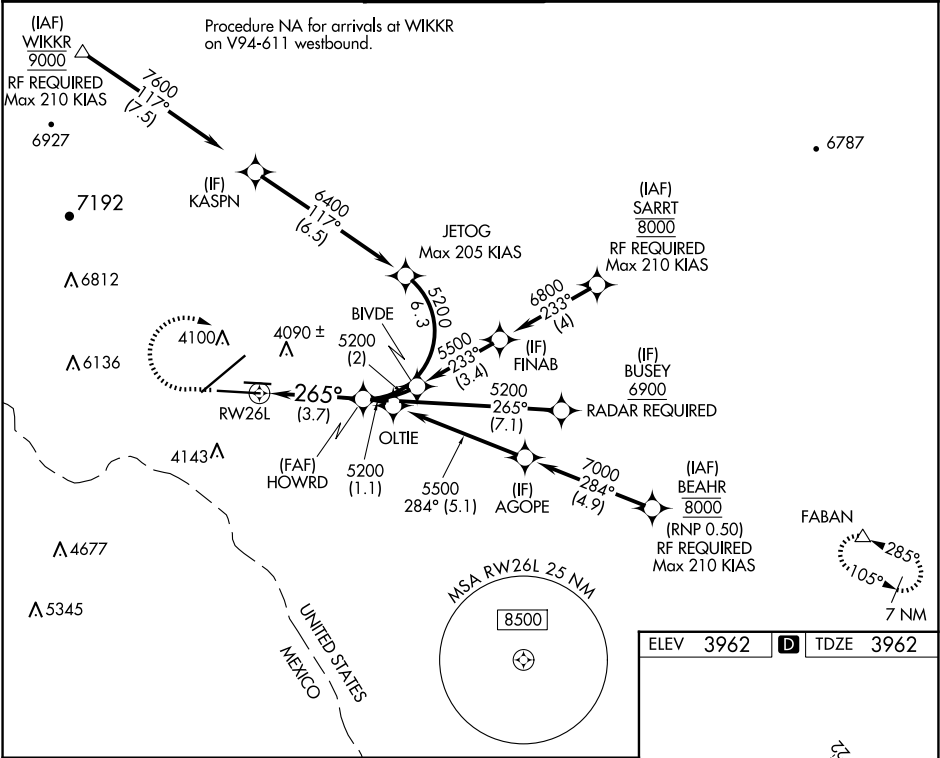

4400 7500 FABAN

VGSI and glidepath not coincident (VGSI Angle 3.00/TCH 75).

See planview for multiple IF locations.

HOWRD

5200

GP 3.00° TCH 55

3.7 NM

CATEGORY A B C D

RNP 0.30 DA 4275-½ 313 (400-½)

AUTHORIZATION REQUIRED

ELEV 3962 TDZE 3962

12620 X 150 0.3% DOWN

5499 X 75 26L 26R

9025 X 150 0.5% UP 0.3% DOWN

TWR

265°

MIRL Rwy 8L-26R
REIL Rwy 4 and 8R
HIRL Rwy 4-22 and 8R-26L