RNAV (GPS) RWY 9
FLORENCE RGNL (FLO)

WAAS CH 70710 W09A	APP CRS 092°	Rwy Ldg 6502 TDZE 147 Apt Elev 147

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Circling Rwy 1, 19 NA at night.

MALSR

MISSED APPROACH: Climb to 2000 direct ESVAC and hold.

ATIS	FLORENCE APP CON★	FLORENCE TOWER★	GND CON	UNICOM
123.625	118.6 341.7 (256°-074°) 135.25 316.15 (075°-255°)	125.1 (CTAF) L 353.85	121.9 353.85	122.95

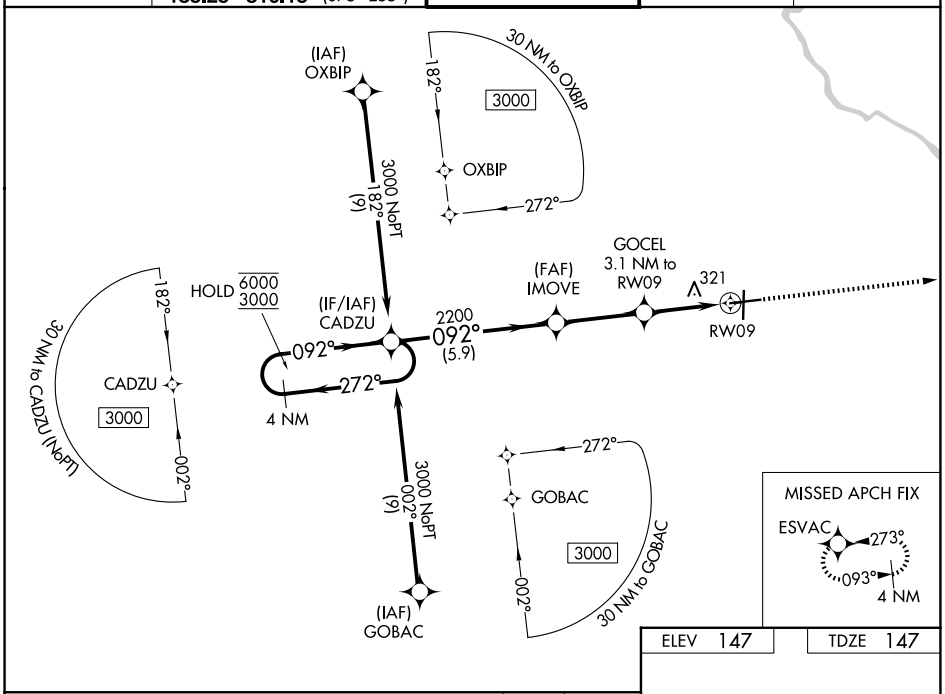

ELEV 147 TDZE 147

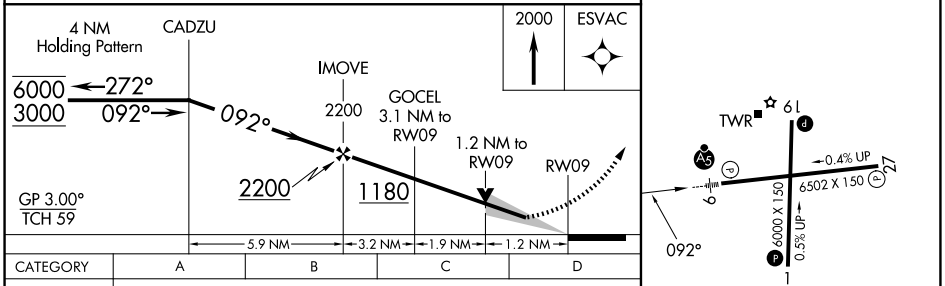

CATEGORY	A	B	C	D
LPV DA	347-½ 200 (200-½)			
LNAV/VNAV DA	603-⅞ 456 (500-⅞)			
LNAV MDA	580-½ 433 (500-½)		580-¾ 433 (500-¾)	
CIRCLING	640-1 493 (500-1)	660-1 513 (600-1)	900-2¼ 753 (800-2¼)	900-2½ 753 (800-2½)

REIL Rwys 1,19 and 27 L
HIRL Rwy 9-27 L
MIRL Rwy 1-19

SE-2, 27 NOV 2025 to 25 DEC 2025

SE-2, 27 NOV 2025 to 25 DEC 2025