


LOC/DME I-SXH 108.95 Chan 26(Y)	APP CRS 093°	Rwy Ldg TDZE 669 Apt Elev 680
--	------------------------	---

ILS or LOC RWY 10C
CHICAGO O'HARE INTL (ORD)

From GIBNS: RNAV-1 GPS required.			ALSf-2		MISSED APPROACH: Climb to 4000 on heading 093° and CGT VORTAC R-336 to CGT VORTAC and hold.			
RNAV 1-GPS or RADAR required for procedure entry. DME or RADAR required.								
Simultaneous approach authorized.								
D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 120.75 348.0	GND CON 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)		(TWR CENTER) 121.75 (OBND) 121.9 (IBND)		CLNC DEL 121.6	CPDLC

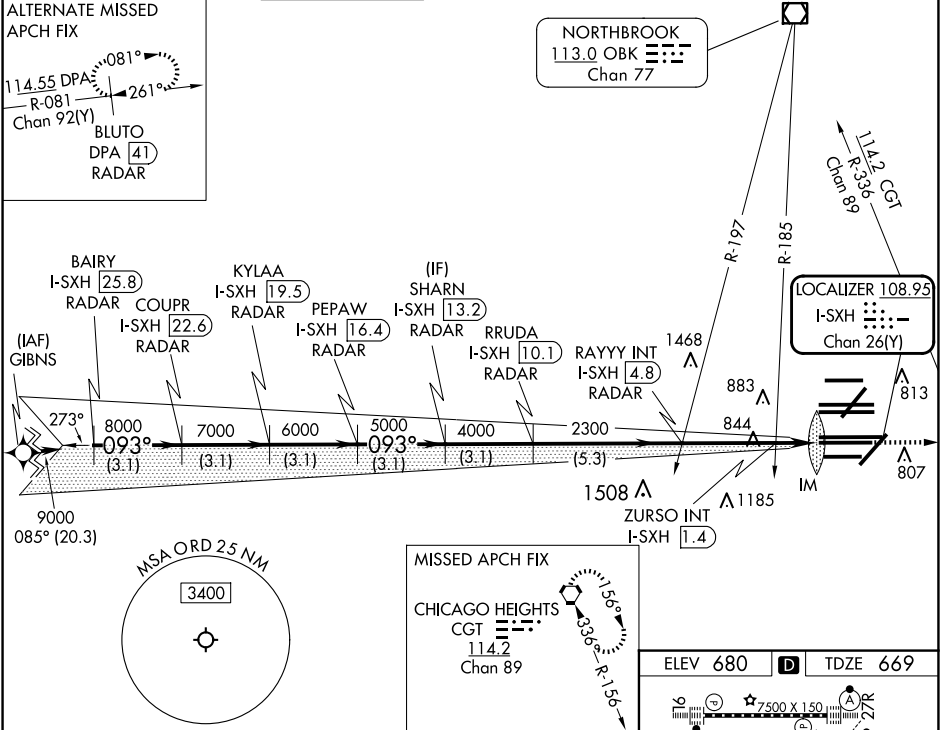

BAIRY I-SXH (25.8) RADAR		VGSJ and ILS glidepath not coincident KYLAA (VGSJ Angle 3.00/TCH 75). I-SXH (19.5) RADAR		SHARN I-SXH (13.2) RADAR		RAYYY INT I-SXH (4.8) RADAR		4000 ↑ hdg 093°		CGT R-336		CGT ☒	
												*LOC only	
9000 093° 8000 7000 6000 5000 4000 2300													
COUPR I-SXH (22.6) RADAR		PEPAW I-SXH (16.4) RADAR		RRUDA I-SXH (10.1) RADAR		ZURSO INT I-SXH (1.4) RADAR		I-SXH DME ANTENNA				I-SXH (0.2) IM	
GS 3.00° TCH 55													
→ 3.1 NM		3.1 NM		3.1 NM		3.1 NM		5.3 NM		3.4 NM		1.5 NM 0.1 NM	
CATEGORY		A		B		C						D	
S-ILS 10C				869/18		200 (200-½)							
S-LOC 10C		1220/24		551 (600-½)		1220/60		551 (600-1¼)					
ZURSO FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)													
S-LOC 10C		1100/24		431 (500-½)		1100/40		431 (500-¾)					

