

|                                        |                        |                                                   |             |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|
| WAAS<br>CH <b>82539</b><br><b>W27A</b> | APP CRS<br><b>272°</b> | Rwy Idg<br>TDZE <b>629</b><br>Apt Elev <b>631</b> | <b>5001</b> |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|

AL-183 (FAA)



RNAV (GPS) RWY 27  
GREENWOOD COUNTY (GRD)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C (14°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Laurens altimeter setting.  
DME/DME RNP-0.3 NA. Circling Rwy 5, 23 NA at night. Rwy 27 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Laurens altimeter setting: increase LPV DA to 932 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 936 feet and all visibilities ½ SM; increase all MDA 60 feet and LNAV visibility Cats C and D ½ SM and Circling visibility Cats C and D ¼ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to ½ SM and LNAV all Cats visibility to 1 SM. For inop ALS when using Laurens altimeter setting, increase LPV and LNAV/VNAV all Cats and LNAV Cats A and B visibility to 1 SM and LNAV Cats C and D visibility to 1½ SM.

ODALS

MISSED APPROACH:  
Climb to 2500 direct  
MACER and hold.

|                        |                                       |                                          |
|------------------------|---------------------------------------|------------------------------------------|
| ASOS<br><b>121.125</b> | GREER APP CON ★<br><b>120.6 350.2</b> | UNICOM<br><b>122.975</b> (CTAF) <b>0</b> |
|------------------------|---------------------------------------|------------------------------------------|

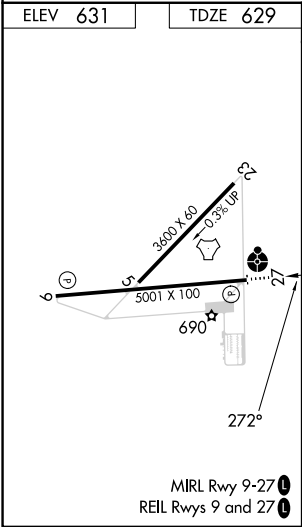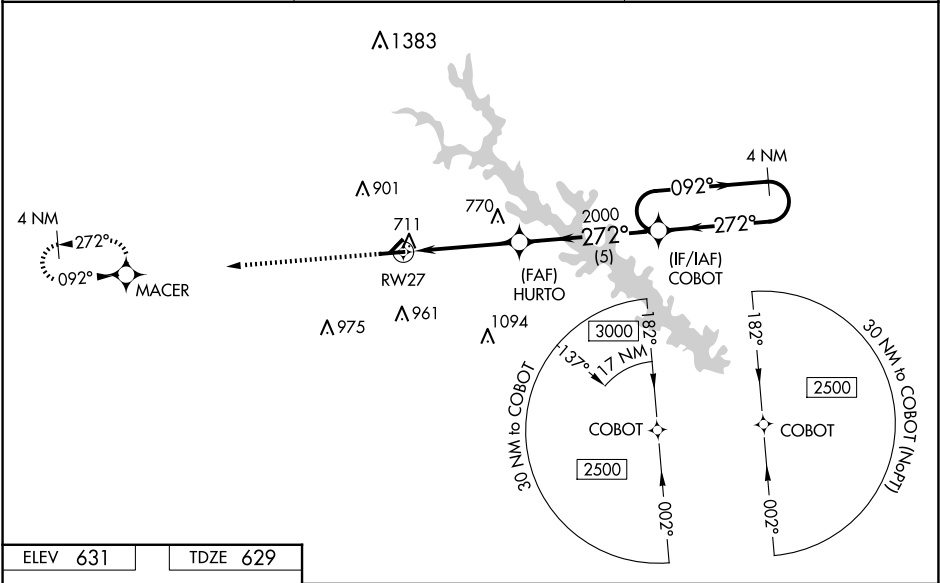

|               |                       |                       |                       |                         |
|---------------|-----------------------|-----------------------|-----------------------|-------------------------|
| 2500          | MACER                 |                       |                       |                         |
| *LNAV only.   | HURTO                 | 2000                  | 272°                  | 092°                    |
| *1 NM to RW27 | 2000                  | 272°                  | 2500                  | GP 3.00° TCH 53         |
| 1 NM          | 3.2 NM                | 5 NM                  |                       |                         |
| CATEGORY      | A                     | B                     | C                     | D                       |
| LPV DA        | 879-¾                 | 250 (300-¾)           |                       |                         |
| LNAV/VNAV DA  | 883-¾                 | 254 (300-¾)           |                       |                         |
| LNAV MDA      | 980-¾                 | 351 (400-¾)           | 980-⅞                 | 351 (400-⅞)             |
| CIRCLING      | 1080-1<br>449 (500-1) | 1100-1<br>469 (500-1) | 1320-2<br>689 (700-2) | 1340-2¼<br>709 (800-2¼) |

SE-2, 27 NOV 2025 to 25 DEC 2025

SE-2, 27 NOV 2025 to 25 DEC 2025