

WAAS CH 50306 W05B	APP CRS 050°	Rwy Ldg 10000 TDZE 791 Apt Elev 796
--	------------------------	--

RNAV (GPS) Y RWY 5R

INDIANAPOLIS INTL (IND)


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized. LNAV

▲ procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSIF-2

MISSED APPROACH:
Climb to 1500 then
climbing right turn to
3000 direct OZMOE
and hold.

D-ATIS 134.25	INDIANAPOLIS APP CON 128.175 317.8	INDY TOWER 120.9 251.1	GND CON 121.9	CLNC DEL 128.75 251.1	CPDLC
-------------------------	--	----------------------------------	-------------------------	---------------------------------	-------

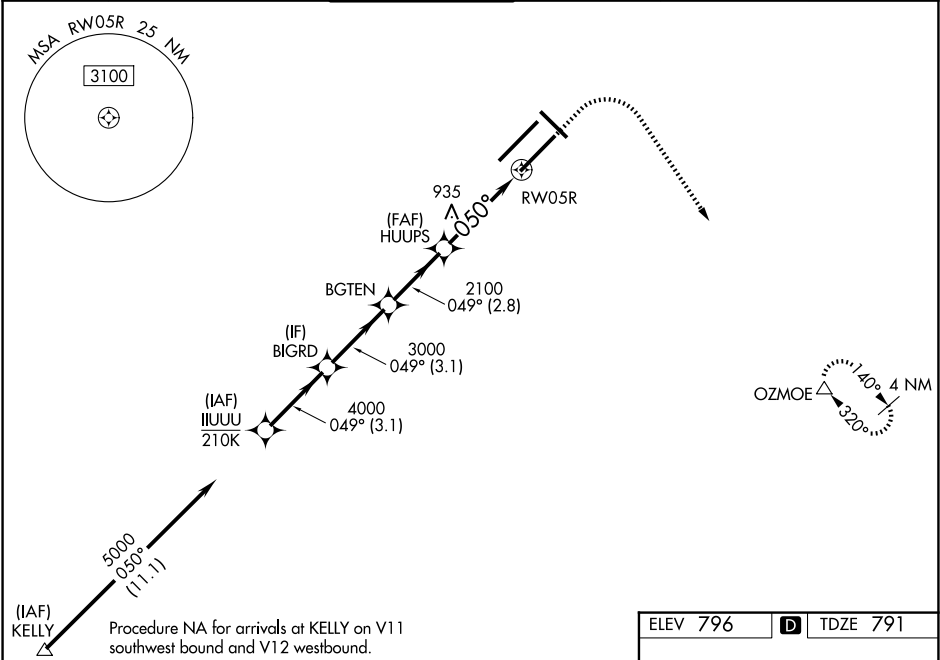

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 71).					
GP 3.00° TCH 50					
*LNAV only.					
*1.1 NM to RW05R					
CATEGORY					
LPV DA					
LNAV/VNAV DA					
LNAV MDA					
CIRCLING					

ELEV 796 **D** TDZE 791

HIRL all Rwy's
TDZ/CL Rwy's 5L and 5R