


ILS or LOC RWY 19  
KANSAS CITY DOWNTOWN/WHEELER FLD (MKC)

**MISSED APPROACH:** Climb to 1300 then climbing right turn to 4000 direct TOP VORTAC and hold.

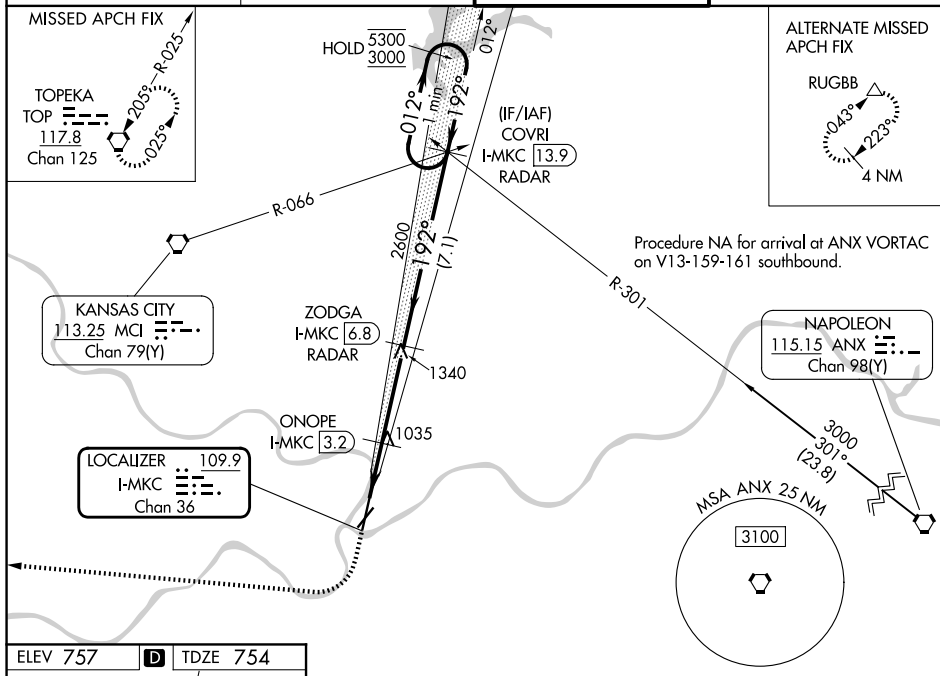

The diagram illustrates the radar coverage area for ZODGA. It shows a series of radar types and their ranges: I-MKC 1.1, I-MKC 2.7, ONOPE I-MKC 3.2, ZODGA I-MKC 6.8, and COVRI I-MKC 13.9. The coverage area is defined by a series of arcs and lines, with a One Minute Holding Pattern indicated. The diagram also shows the GS 3.00° TCH 46 and the 192° bearing.

| CATEGORY           | A                      | B                      | C                     | D                       |
|--------------------|------------------------|------------------------|-----------------------|-------------------------|
| S-ILS 19           | 1004/40 250 (300-¾)    |                        |                       |                         |
| S-LOC 19           | 1460/40<br>706 (800-¾) | 1460/55<br>706 (800-1) | 1460-17/8             | 706 (800-17/8)          |
| CIRCLING           | 1460-1 703 (800-1)     |                        | 1460-2<br>703 (800-2) | 1540-2½<br>783 (800-2½) |
| ONOPE FIX MINIMUMS |                        |                        |                       |                         |
| S-LOC 19           | 1300/40                | 546 (600-¾)            | 1300-1¾               | 546 (600-1¾)            |
| CIRCLING           | 1380-1<br>623 (700-1)  | 1400-1<br>643 (700-1)  | 1460-2<br>703 (800-2) | 1540-2½<br>783 (800-2½) |