



LOC I-BUI 111.7	APP CRS 231°	Rwy Ldg TDZE Apt Elev 9495 984 986
---------------------------	------------------------	--

ILS or LOC RWY 23R

MC GHEE TYSON (T'YS)

DME or RADAR required.		ALSIF-2	MISSED APPROACH: Climb to 2000 then climbing right turn to 4000 on heading 240° and VXV VORTAC R-231 to GROSS INT/VXV 29.1 DME and hold.
For inop ALS, increase S-ILS 23R Cat E visibility to RVR 4000; increase S-LOC 23R Cat C/D/E visibility to 1½ SM.			

ATIS 128.35	KNOXVILLE APP CON 123.9 360.8	KNOXVILLE TOWER 121.2 257.8	GND CON 121.9 348.6	CLNC DEL 121.65
-----------------------	---	---------------------------------------	-------------------------------	---------------------------

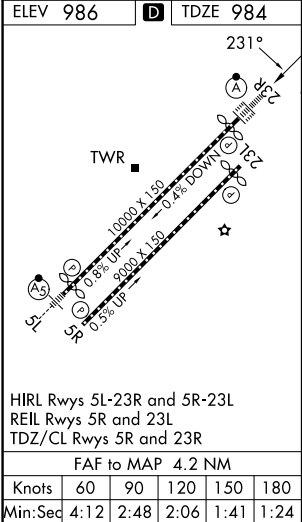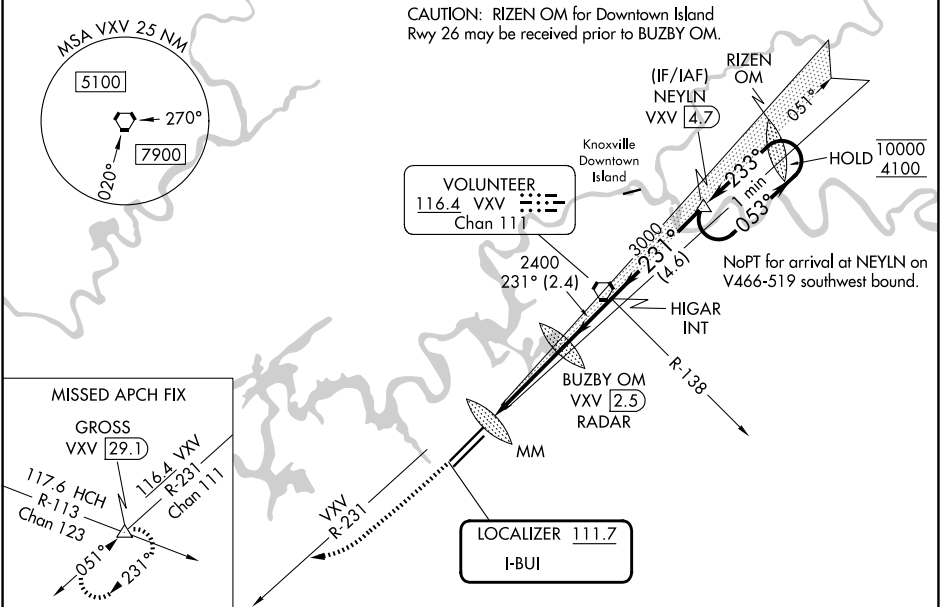

2000 ↑		4000 hdg 240°		VXV R-231		GROSS △		One Minute Holding Pattern			
								NEYLN VXV (4.7)			
				BUZBY OM VXV (2.5)		HIGAR INT					
				RADAR 2364							
		VXV (5)									
		MM									
		VXV (6.6)									