



WAAS CH 81902 W23A	APP CRS 231°	Rwy Ldg TDZE 984 Apt Elev 986
--	------------------------	---

RNAV (GPS) RWY 23R

MC GHEE TYSON (TYS)

RNP APCH - GPS.	ALSF-2	MISSED APPROACH: Climb to 1600 then climb to 3000 direct GROSS and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.		

ATIS 128.35	KNOXVILLE APP CON 123.9 360.8	KNOXVILLE TOWER 121.2 257.8	GND CON 121.9 348.6	CLNC DEL 121.65
-----------------------	---	---------------------------------------	-------------------------------	---------------------------

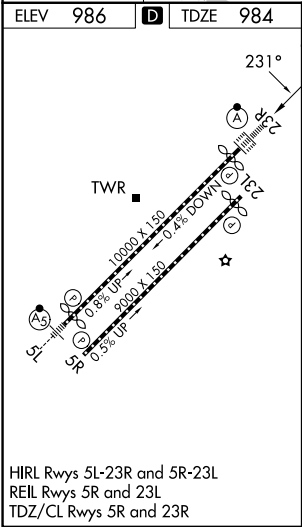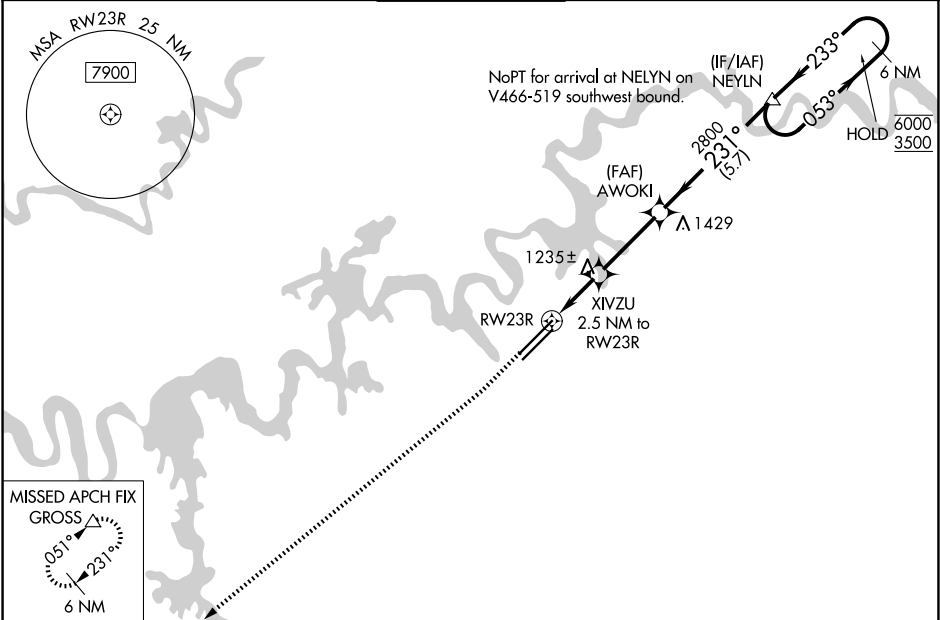

		1600	3000	GROSS					
		↑	↑	△					
					AWOKI				
					2800				
					XIVZU 2.5 NM to RW23R				
					1.4 NM to RW23R				
					RW23R				
					1820				
					3.1 NM				
					5.7 NM				
CATEGORY	A	B	C	D					
LPV DA	1184/18	200 (200-½)							
LNAV/VNAV DA	1529-1½	545 (600-1½)							
LNAV MDA	1500/24	516 (600-½)	1500/55	516 (600-1)					
CIRCLING	1500-1 514 (600-1)	1560-1 574 (700-1)	1660-2 674 (700-2)	1900-3 914 (1000-3)					