WAAS CH 93728 W09A	APP CRS 090°	Rwy ldg 5198 TDZE 428 Apt Elev 430

RNAV (GPS) RWY 9

LAWRENCEVILLE-VINCENNES INTL (LWV)

Baro-VNAV NA when using Mount Carmel altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Mount Carmel altimeter setting: increase LPV DA to 704 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 855 feet and all visibilities ⅛ SM; increase all MDAs 40 feet and LNAV visibility Cat C/D ⅛ SM, and Circling visibility Cat D ¼ SM. Circling to Rwy 36 NA at night.

MISSED APPROACH: Climb to 2600 direct YONUB and hold.

ASOS	EVANSVILLE APP CON ★	UNICOM
118.0	125.6 343.7	122.8 (CTAF) L

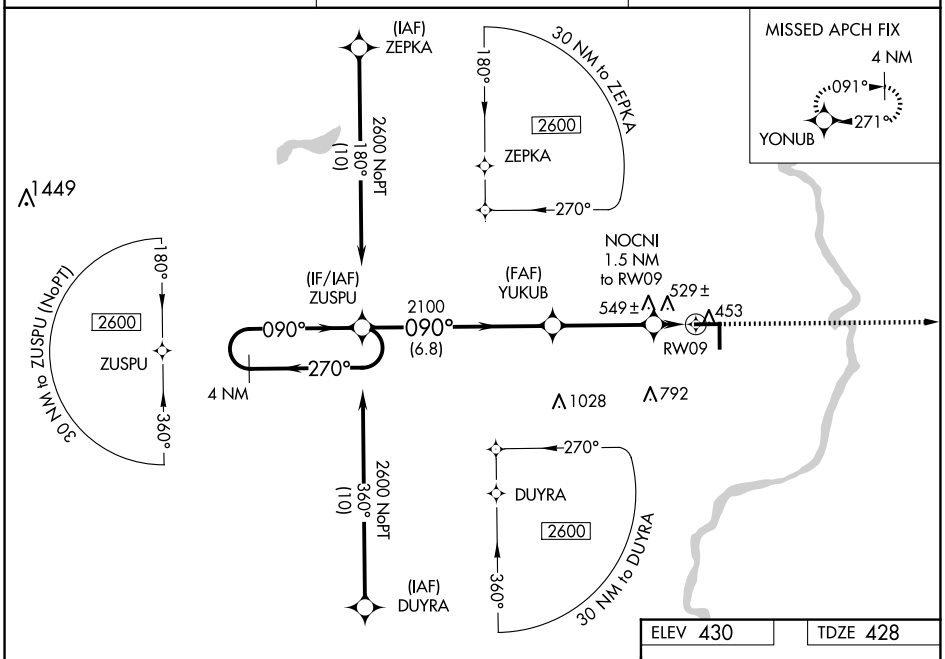

ELEV 430 TDZE 428

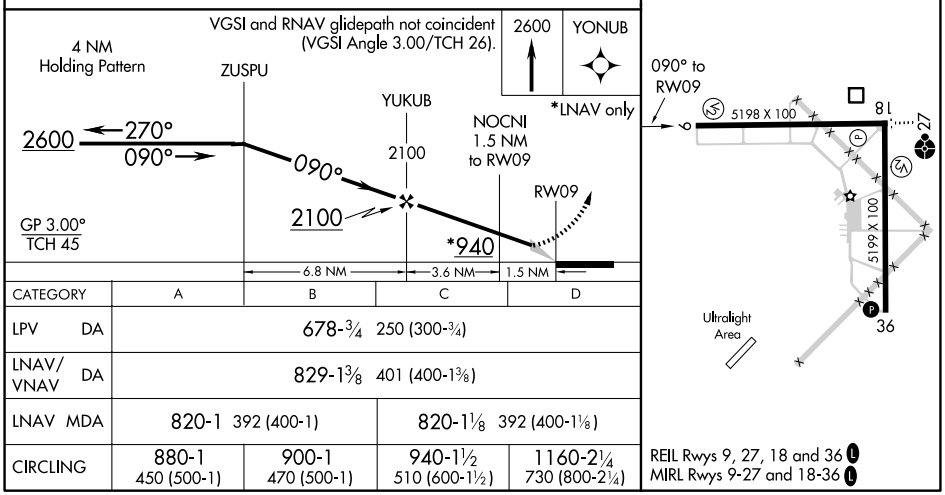

CATEGORY	A	B	C	D
LPV DA	678-¾ 250 (300-¾)			
LNAV/VNAV DA	829-1⅜ 401 (400-1⅜)			
LNAV MDA	820-1 392 (400-1)		820-1⅛ 392 (400-1⅛)	
CIRCLING	880-1 450 (500-1)	900-1 470 (500-1)	940-1½ 510 (600-1½)	1160-2¼ 730 (800-2¼)

REIL Rwys 9, 27, 18 and 36 L
MIRL Rwys 9-27 and 18-36 L

EC-3, 27 NOV 2025 to 25 DEC 2025

EC-3, 27 NOV 2025 to 25 DEC 2025