

LOC I-OCZ	APP CRS	Rwy Ldg
111.1	177°	12901
		TDZE
		1195
		Apt Elev
		1219

ILS Y or LOC Y RWY 18


LINCOLN (LNK)

⚠ When local altimeter setting not received use Beatrice altimeter setting and increase DA to 1486; and all MDA 100 feet, increase visibility S-LOC 18 Cat C, D, E and Circling Cats C and D ¼ SM; increase ROROC fix minimums S-LOC 18 Cat C/D/E visibility ⅓ SM and Circling Cats C and D ¼ SM. For inop ALS, increase S-ILS 18 Cat E visibility to RVR 4000, S-LOC 18 Cat E visibility to 1¾ SM, and ROROC fix minimums S-LOC 18 Cat E visibility to 1½ SM. For inop ALS when using Beatrice altimeter setting, increase S-ILS 18 all Cats visibility to RVR 4500, S-LOC 18 Cat E visibility to 2 SM, and ROROC fix minimums S-LOC 18 Cat C/D/E visibility to 1¾ SM.
#RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH:
Climb to 1700 then climbing right turn to 3000 direct LNK VORTAC and hold.

ATIS	OMAHA APP CON	LINCOLN TOWER*	GND CON	UNICOM
118.05 290.9	124.0 270.3	118.5(CTAF) 253.5	121.9 275.8	122.95

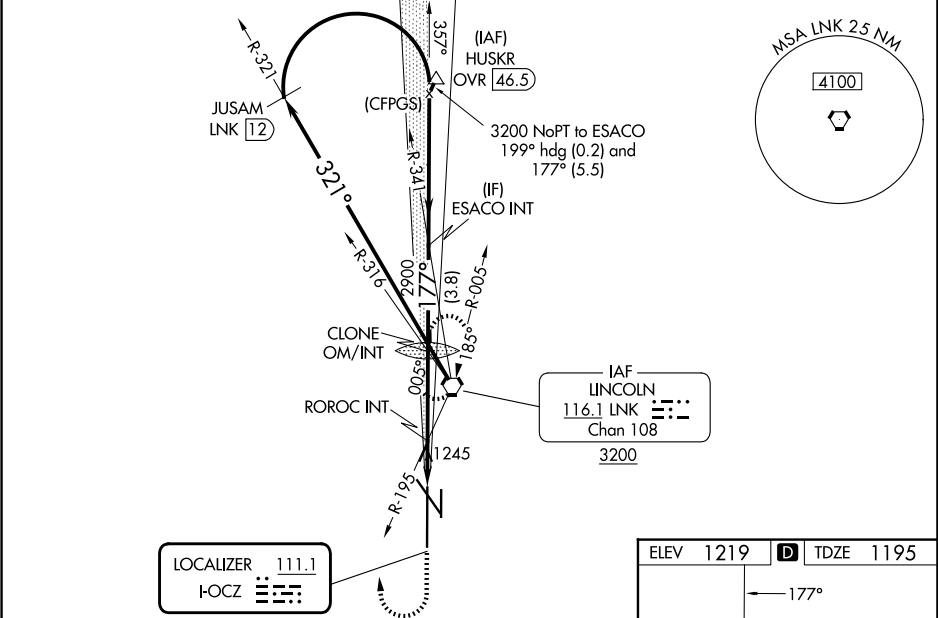

1700	3000	LNK																																														
*1880 when using Beatrice altimeter setting.																																																
<table><tr><td>CATEGORY</td><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td></tr><tr><td>S-ILS 18 #</td><td colspan="5">1395/24 200 (200-½)</td></tr><tr><td>S-LOC 18</td><td>1780/24</td><td>585 (600-½)</td><td>1780-1¼</td><td>585 (600-1¼)</td><td></td></tr><tr><td>CIRCLING</td><td>1780-1</td><td>561 (600-1)</td><td>1820-1¾ 601 (700-1¾)</td><td>1960-2½ 741 (800-2½)</td><td>2040-3 821 (900-3)</td></tr><tr><td colspan="6">ROROC FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)</td></tr><tr><td>S-LOC 18</td><td>1720/24</td><td>525 (600-½)</td><td>1720/55</td><td>525 (600-1)</td><td></td></tr><tr><td>CIRCLING</td><td>1720-1 501 (600-1)</td><td>1760-1 541 (600-1)</td><td>1820-1¾ 601 (700-1¾)</td><td>1960-2½ 741 (800-2½)</td><td>2040-3 821 (900-3)</td></tr></table>							CATEGORY	A	B	C	D	E	S-ILS 18 #	1395/24 200 (200-½)					S-LOC 18	1780/24	585 (600-½)	1780-1¼	585 (600-1¼)		CIRCLING	1780-1	561 (600-1)	1820-1¾ 601 (700-1¾)	1960-2½ 741 (800-2½)	2040-3 821 (900-3)	ROROC FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)						S-LOC 18	1720/24	525 (600-½)	1720/55	525 (600-1)		CIRCLING	1720-1 501 (600-1)	1760-1 541 (600-1)	1820-1¾ 601 (700-1¾)	1960-2½ 741 (800-2½)	2040-3 821 (900-3)
CATEGORY	A	B	C	D	E																																											
S-ILS 18 #	1395/24 200 (200-½)																																															
S-LOC 18	1780/24	585 (600-½)	1780-1¼	585 (600-1¼)																																												
CIRCLING	1780-1	561 (600-1)	1820-1¾ 601 (700-1¾)	1960-2½ 741 (800-2½)	2040-3 821 (900-3)																																											
ROROC FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)																																																
S-LOC 18	1720/24	525 (600-½)	1720/55	525 (600-1)																																												
CIRCLING	1720-1 501 (600-1)	1760-1 541 (600-1)	1820-1¾ 601 (700-1¾)	1960-2½ 741 (800-2½)	2040-3 821 (900-3)																																											

