


LOC/DME I-CFN 111.1 Chan 48	APP CRS 251°	Rwy Ldg	25R	25L
		TDZE	1134	11095
		Apt Elev	104	104
			128	128

ILS or LOC RWY 25R
LOS ANGELES INTL (LAX)

From CRCUS, SEAVU, TRNDO, CLPUR: RNAV 1-GPS required. DME or RADAR required.	MALSR Rwy 25R	ALSF-2 Rwy 25L	MISSED APPROACH: Climb to 2000 on heading 251° until crossing SMO R-160 then left turn on heading 236° and SMO VOR/DME R-195 to CATLY INT/SMO 15.7 DME and hold.
Simultaneous approach authorized. Simultaneous approach authorized with HHR. For inop ALS increase Sidestep 25L Cat C visibility to 1½ SM. #RVR 1800 authorized with use of FD or AP or HUD to DA.			

D-ATIS 133.8	SOCAL APP CON 124.3 363.2 (APCH from W) 124.9 269.0 (090°-224°) 124.5 235.975 (225°-044°) 128.5 360.7 (045°-089°)	LOS ANGELES TOWER 133.9 239.3 (N) 120.95 379.1 (S)	GND CON 121.65 327.0 (N) 121.75 327.0 (S) 121.4 327.0 (W)
------------------------	---	--	---

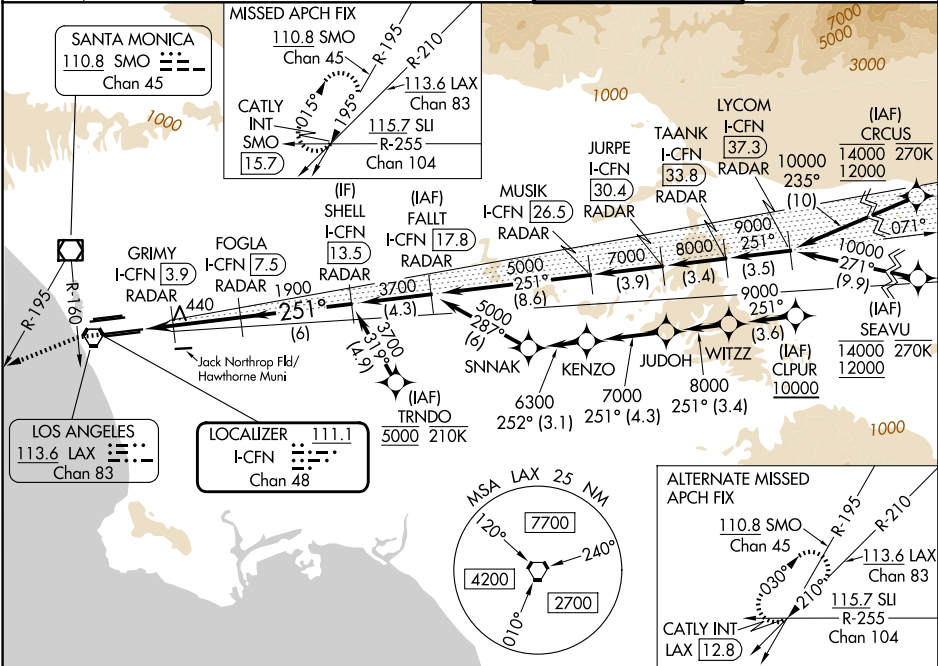

*LOC only	SMO R-160	SMO R-195	CATLY INT	FOGLA I-CFN [7.5] RADAR	SHELL I-CFN [13.5] RADAR
	hdg 251°	hdg 236°			
CATEGORY	A	B	C	D	
S-ILS 25R#	304/24 200 (200-½)				
S-LOC 25R	700/24 596 (600-½)		700-1¼ 596 (600-1¼)		
SIDESTEP 25L	700/55 596 (600-1)		700-1¼ 596 (600-1¼)		

ELEV 128	TDZE 25R 104	TDZE 25L 104
TDZ/CL Rwy 6R, 7L, 24R, and 25L HIRL all Rwy		
FAF to MAP 5.5 NM		
Knots	60	90 120 150 180
Min:Sec	5:30	3:40 2:45 2:12 1:50

LOS ANGELES INTL (LAX)
ILS or LOC RWY 25R

SW-3, 27 NOV 2025 to 25 DEC 2025

SW-3, 27 NOV 2025 to 25 DEC 2025