

WAAS CH 49007 W25B	APP CRS 251°	Rwy Ldg 11134 TDZE 104 Apt Elev 128
--	------------------------	--

RNAV (GPS) Y RWY 25R

LOS ANGELES INTL (LAX)

RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C or above 54°C. Simultaneous approach authorized. Simultaneous approach authorized with HHR. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. # RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR



MISSED APPROACH:

Climb to 2000 direct ZIMRU and track 188° to CATLY and hold.

D-ATIS 133.8	SOCAL APP CON 124.3 363.2 (APCH from W) 124.9 269.0 (090°-224°) 124.5 235.975 (225°-044°) 128.5 360.7 (045°-089°)	LOS ANGELES TOWER 133.9 239.3 (N) 120.95 379.1 (S)	GND CON 121.65 327.0 (N) 121.75 327.0 (S) 121.4 327.0 (W)
------------------------	---	--	---

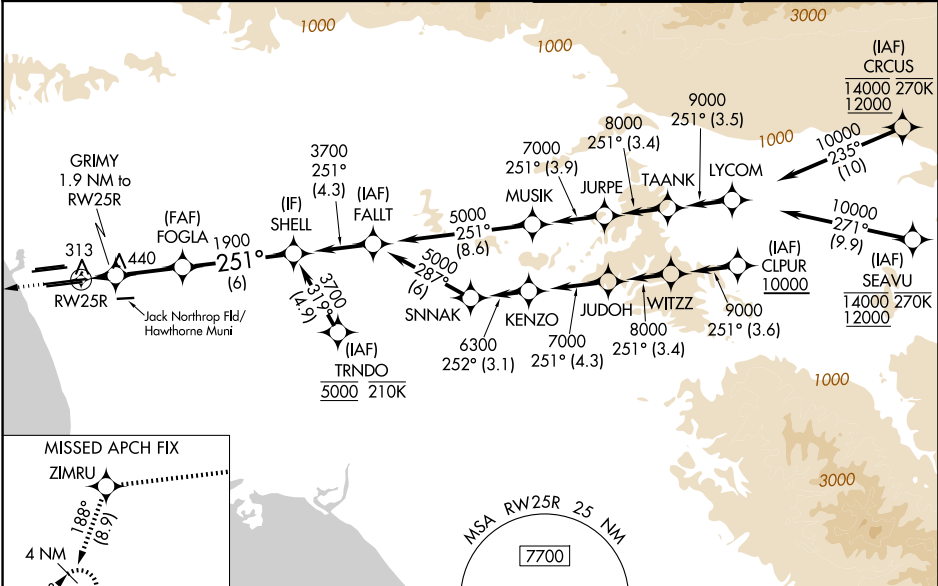

2000

ZIMRU

tr 188°

CATLY

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).

FOGLA

3700

251°

1900

740*

GP 3.00°

TCH 54

* LNAV only

GRIMY

1.9 NM to RW25R

1.9 NM

3.6 NM

6 NM

CATEGORY	A	B	C	D
LPV DA#	304/24 200 (200-½)			
LNAV/VNAV DA	578/60 474 (500-1¼)			
LNAV MDA	640/24 536 (600-½)		640/55 536 (600-1)	

TDZ/CL Rwy 6R, 7L, 24R, and 25L

HIRL all Rwy's