

25331

RNAV (GPS) RWY 26
LUBBOCK PRESTON SMITH INTL (LBB)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 52°C.
▲ For inop ALS, increase LPV Cat E visibility to RVR 4000; increase LNAV/VNAV Cat E visibility to RVR 5000; and increase LNAV Cat C/D/E visibilities to RVR 4500.
**RVR 1800 authorized with use of FD or AP or HUD to DA.

MISSED APPROACH:
Climb to 5200 direct
KAPWU and hold.

MSA RW 26 2.5 NM

5300

Procedure NA for arrivals at FLOYD on V14 northeast bound.


5000

234° (13.1)

(IAF) EVENE



195° (13)

FLOYD

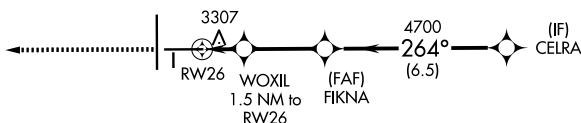


REIL Rwy 8

HIRL Rwy 8-26 and 17R-35L



Procedure NA for arrivals at SLIDE on V76-81 southbound

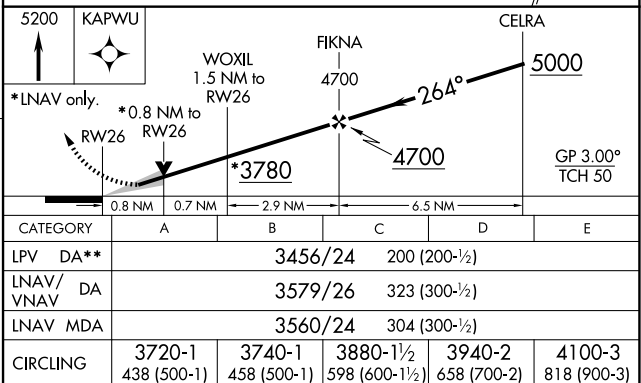

LUBBOCK PRESTON SMITH INTL (LBB)
RNAV (GPS) RWY 26

SC-2, 27 NOV 2025 to 25 DEC 2025