

LOC/DME I-DQJ	APP CRS	Rwy Ldg	7015
111.55	214°	TDZE	887
Chan 52 (Y)		Apt Elev	887

ILS or LOC RWY 21



DANE COUNTY RGNL/TRUAX FLD (MSN)

For inop ALS, increase S-LOC 21 Cat C/D visibility to 1½ mile.

MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 2700 on MSN VORTAC R-282 to IMMES INT/MSN VORTAC 9.2 DME and hold.

ATIS	MADISON APP CON★	MADISON TOWER★	GND CON	UNICOM
124.65 278.3	135.45 343.7	119.3 (CTAF) 0 257.8	121.9 348.6	122.95

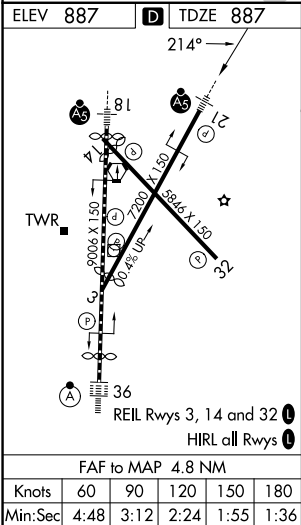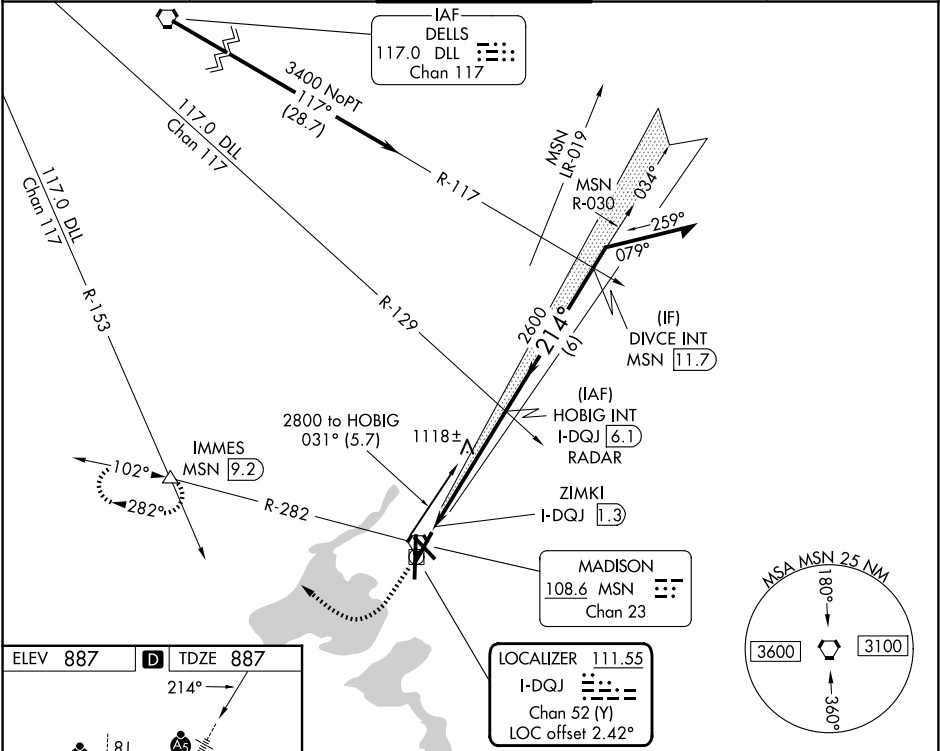

1500	2700	IMMES	HOBIG INT	Remain within 10 NM
↑	MSN R-282	△	I-DQJ 6.1 / RADAR	
			2600	034°
			214°	2800
			2600	GS 3.00° TCH 53
			0.3 1.1 NM 3.8 NM	
CATEGORY	A	B	C	D
S-ILS 21	1137-½ 250 (300-½)			
S-LOC 21	1380-½ 493 (500-½)		1380-1 493 (500-1)	
CIRCLING	1420-1 533 (600-1)	1460-1 573 (600-1)	1460-1½ 573 (600-1½)	1700-2¾ 813 (900-2¾)

EC-3, 27 NOV 2025 to 25 DEC 2025

EC-3, 27 NOV 2025 to 25 DEC 2025