




LOC I-JIM <u>108.7</u>	APP CRS 273°	Rwy Ldg 8946 TDZE 292 Apt Elev 341
----------------------------------	------------------------	---

ILS or LOC RWY 27
MEMPHIS INTL (MEM)

RNAV 1-GPS or RADAR required for procedure entry.		MALSR 		MISSED APPROACH: Climb to 5000 and intercept MEM VORTAC R-285 to GOWRI INT/17 DME and hold, continue climb-in-hold to 5000.	
 For inop ALS, increase S-ILS Cat E visibility to RVR 4000, and S-LOC Cat E visibility to 2 SM. IPEE fix minimums S-LOC Cat E visibility to 1/4 SM.  *RVR 1800 authorized with use of FD or AP or HUD to DA.					
MEMPHIS APP CON		MEMPHIS TOWER		GND CON	
119.1	291.6 (176°-355°)	(Rwy 9-27)	118.3 257.8	(Rwy 9-27)	121.0 379.2
		(Rwys 18C-36C, 18L-36R)	119.7 257.8	(Rwys 18C-36C, 18L-36R)	121.9 379.2
125.8	338.3 (356°-175°)	(Rwy 18R-36L)	128.425 257.8	(Rwy 18R-36L)	121.65 379.2

D-ATIS 127.75	
-------------------------	--

ALTERNATE MISSED
APCH FIX

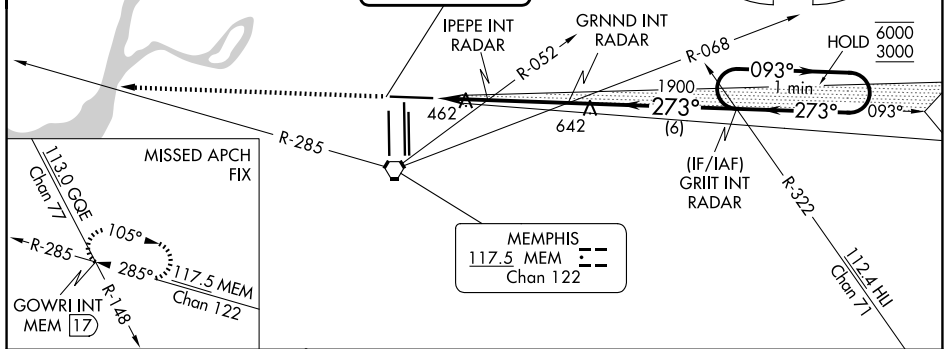

MEMPHIS, TENNESSEE
Amdt 4D 30NOV23

35°03'N-89°59'W

MEMPHIS INTL (MEM)
ILS or LOC RWY 27