

MIAMI, FLORIDA

AL-257 (FAA)



25275

APP CRS	Rwy Ldg	12755
272°	TDZE	9
	Apt Elev	9

RNAV (RNP) Z RWY 27
MIAMI INTL (MIA)

RNP AR APCH-GPS.	MALSR	MISSED APPROACH: Climb to 800 then climbing right turn to 4000 direct BRBRA and hold, continue climb-in-hold to 4000.
Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below 8°C or above 54°C. For inop ALS, increase RNP 0.11 visibility to RVR 4500 all Cats.		

D-ATIS 119.15	MIAMI APP CON 124.85 322.3	MIAMI TOWER 118.3 256.9	GND CON 121.8 (8L/8R/12/26L/26R) 348.6 127.5 (9/27/30)
------------------	-------------------------------	----------------------------	--

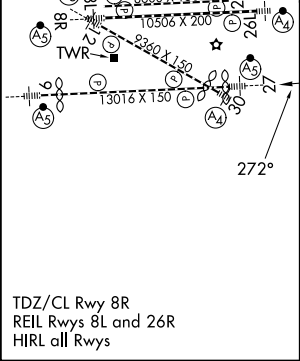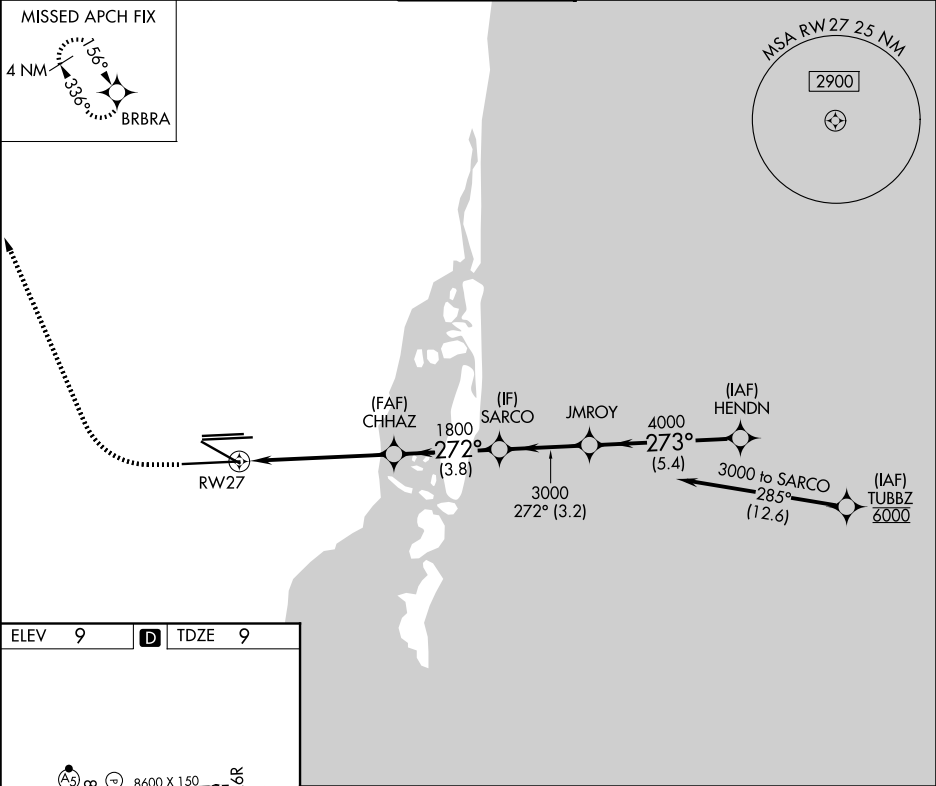

800	4000	BRBRA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).	HENDN
RW27	CHHAZ	SARCO	JMROY	5000
1800	1800	3000	4000	
5.5 NM	3.8 NM	3.2 NM	5.4 NM	
CATEGORY	A	B	C	D
RNP 0.11 DA	327/24	318 (400-1/2)		
RNP 0.30 DA	405/35	396 (400-5/8)		
AUTHORIZATION REQUIRED				

MIAMI, FLORIDA
Amdt 3 12AUG21

25°48'N-80°17'W

MIAMI INTL (MIA)

RNAV (RNP) Z RWY 27

SE-3, 27 NOV 2025 to 25 DEC 2025

SE-3, 27 NOV 2025 to 25 DEC 2025